

73 DIPOLE and LONG-WIRE ANTENNAS

Antenna experimentation offers an unique opportunity to make amateur radio hobby more than an operational spectator activity. All you need are telescoping masts, antenna wire, insulators, ingenuity, and a desire to experiment.

Antenna types from dipole to rhombic are covered in this book, and the topics are arranged in a sequential manner – from simple constructions to increasingly more complex ones. However, if the reader is interested in just one type of antenna, he can go directly to that type.

The necessary mathematics are included, but no extensive knowledge is required to build the antennas described. Simple test instruments are shown which will enable the reader to optimize the designs and obtain maximum performance from his antenna.

Many of these antennas compete with, and some surpass, the performance of commercial beams. The serious experimenter will find in *73 Dipole and Long-Wire Antennas* examples of almost every type of wire antenna included for the first time under one cover.

ABOUT THE AUTHOR

Ed Noll is an accomplished author of technical books, lessons, articles, and instruction manuals. His other books include:

Shortwave Listener's Guide for Apartment/Condo Dwellers

Easy-Up Antennas for Radio Listeners and Hams

Ham Radio Communications Circuit Files

MFJ-3302

MFJ ENTERPRISES, INC.
P. O. Box 494
Mississippi State, MS 39762

73

Dipole and
Long-wire Antennas

by
Edward M. Noll
W3FQJ

73

Dipole and Long-Wire Antennas

First Edition
2nd Printing - 1992

ISBN # 1-891237-06-3
MEJ-3302, \$12.95

Copyright © 1992 by MEJ ENTERPRISES, INC.
Printed in the United States of America

All rights reserved. Reproduction or use, without expressed permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein.

MEJ

MEJ PUBLISHING COMPANY, INC. Starkville, MS 39759

transmission line and the antenna. In the process, the SWR on the transmission line that links the tuner to the transmitter is brought down to a low value for suitable matching to the transmitter, and to ensure minimum transmission-line loss.

Resonant long-wire vees and rhombics usually have a low antenna resistance, and the step-up ratio between the transmission line and the antenna is not great. Hence, the rather simple tuner arrangement that matches a low-impedance unbalanced transmission line to a balanced antenna feed point of somewhat higher resistance is appropriate (Fig. A-VII-1). Both primary and secondary are series-tuned for minimum loss and lowest standing-wave ratio. Separate plug-in coils are recommended for each band. However the same plug-in coil can be used for both the 10- and 15-meter bands. Coil and component data are given in Fig. A-VII-1. Also given is coil data for intermediate values. If the very lowest SWR's for a variety of antennas are to be obtained, you may find one of these is better suited for a given situation.

The tuner adjusts very quickly and there is no need for making coil taps. An SWR meter is connected between the transmission line and the input of the tuner. Adjust the two tuner controls for a minimum SWR. Jockey back and forth between the two controls to obtain the very lowest minimum. The tuner must be re-adjusted, of course, when changing bands, or when changing from one end of the band to the other.

If you wish to construct a very versatile tuner that can meet almost any antenna situation around the amateur station, the author recommends highly the one described by Lew G. McCoy on page 58 of *QST*, July 1965. This tuner includes a standing-wave meter and has the flexibility needed to match both high and low antenna resistances.

FOREWORD

Although the means of support and erection and variations change with time, the performance of a specific antenna and its specific variations *do not*. The ways of tuning and matching an antenna also change. Regardless of these facts the antenna will perform as expected when a proper match is attained. Proper matching is more important and narrow for modern transmitters as compared to the vacuum-tube outputs of older transmitters.

The antennas described in this book, except for site and propagation conditions, will perform just the same as they did years ago. You may wish to try some of the antennas and methods of matching as well as construction methods.

Except for short antenna heights, the high telescoping mast has gone with the changes in television station powers, efficiencies, high receiver sensitivity, cable and satellites. More rigid and safer masts are the rule today.

Be Safe

Safety is a prime personal responsibility when erecting and installing antennas. Electric shock, physical injury, and damage to property are dangers. Plan your antenna well and organize your procedures wisely. Be certain to position your antenna and mast where it cannot come in contact with or drop upon power lines when it is being installed or in a storm, or upon a person or neighbor's property when it is being erected or in a storm, or when its parts become fatigued. Use a wire quality and size that can withstand the stress of erection and weather. An added safety factor is provided by insulated antenna wire. A high installation increases the magnitude of all the danger factors of concern. Try to anticipate hazards before you go ahead with the installation. Don't forget lightning protection or an exterior disconnect.

load (Fig. A-VI-3). In this case there is little or no r-f energy present at the far end of the second leg of the antenna. Thus, if at all possible, you should check for the presence of r-f energy at the ends of both legs of the antenna. This is quite easy to do for the inverted-vee antennas or the vee-beam types with sloping ends. False loading should be avoided when you wish no changes in the pattern characteristics of your antenna.

When the center-fed dipole or vee antenna approximates an odd number of quarter wavelengths on a leg, the tuner loads both legs. However, if the leg length approaches an even number of quarter wavelengths the tuner tends to load one leg and the line. For example, when the antenna of topic 31 with 59-foot legs is loaded on 80 meters, it will tune in dipole fashion on 80 meters. However, the 40-meter dimension is so far off the quarter wavelength on a leg value that the tuner will simply load as a random wire with one leg more active than the other.

Contents

SECTION 1. REGULAR AND MODIFIED DIPOLE ANTENNAS

1. Half-Wavelength Dipole	9
2. Dipole Antenna, Line Tuned	11
3. Dipole and Balun	14
4. Novice-Band Dipoles	15
5. Advanced and Extra-Class Band Dipoles	16
6. Lamp-Cord Dipoles	16
7. Twin-Lead Folded Dipole	18
8. Folded Dipole and Balun	18
9. Inverted Dipole	19
10. Novice 15-40 Dipoles	21
11. Novice 15-80 Dipoles	23
12. Novice 40-80 Dipoles	23
13. Novice 15-40-80 Dipoles	24
14. 20-40-80 Maypole	26
15. 20-40-80 C-W Special	28
16. One-Wavelength Antenna	28
17. 3/2-Wavelength Antenna	30
18. Low-Band Segmented Dipoles, 40-80-160	33
19. Middle-Band Segmented Dipoles, 20-40-80	34
20. Open-Wire Two-Band Dipole	35
21. Extra and Advanced Open-Wire Inverted Dipoles	37

SECTION 2. INVERTED-VEE ANTENNAS

22. Center-Fed Monoband Inverted Long-Wire Vees	41
23. Two-Band Inverted Long-Wire Vees—No Tuning	43
24. Two-Band Inverted Vee—End Tuned	44
25. Long-Wire Inverted Vee—Sideband 10-15-20	46
26. All-Band 6-160 Inverted Vee	47
27. 15-40 Novice Inverted Vee	49
28. 15-40-80 Novice Inverted Vee	50

In practice the proper operating conditions are established by using a variable capacitor and two tapped inductors in accordance with the parts list. It has been customary in most designs to place the taps on the coils in some regular manner and let the tuner operating conditions fall where they may. However, if the very lowest standing-wave ratios are to be established, it is helpful to experiment with tap positions for the very best performance. You may wish to start out with uniform positioning of the taps to determine what the operating conditions are on each band. For most bands it is likely that optimum performance can be obtained. However, if you have difficulty bringing the SWR reading down on certain bands, you can experiment with the tap positions. This is particularly the case for the 10- and 15-meter bands.

For the tuner constructed by the author the tap positions shown in Fig. A-VI-1 were found to be optimum. Switch positions for operation in the 10-, 15-, and 20-meter phone bands for the antennas of Fig. 40 are given. Coils L_1 and L_2 must be mounted at right angles to each other.

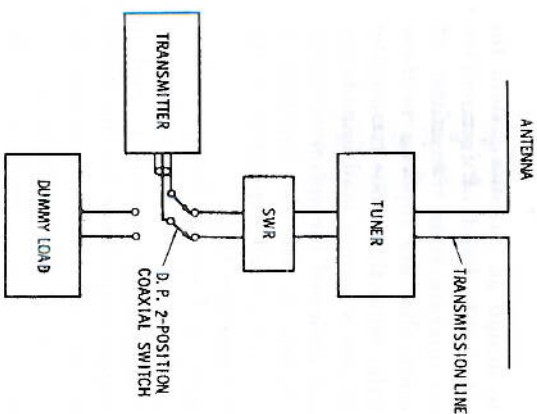


Fig. A-VI-2. Connection plan for adjusting a tuner.

Proper tuning is important if you are to derive the most benefit from your line tuner. The setup of Fig. A-VI-2 is a good one. The transmitter is first worked into a 50-ohm dummy load. Transmitter output-circuit settings (tuning and load) are set down in a notebook for specific frequencies. (You may wish to use the center frequencies of the 10-, 15-, and 20-meter phone bands.) This information helps you set the transmitter reasonably close to optimum and then the line tuner can be adjusted in such a manner

SECTION 7. VERY LONG LONG-WIRE ANTENNAS

- 63. Two-Band Very Long Long-Wire Antenna 121
- 64. End-Tuned Very Long 5 DXCC Long Wire 123
- 65. 5 DXCC Long-Wire Special 125
- 66. All-Band 6-160 End-Fed Very Long Wire With Tuner 126
- 67. Long-Path Short-Path Long-Wire Antenna 128

SECTION 8. SPECIAL VEES AND RHOMBICS

- 68. 160-Meter Two-Mast Inverted Vee 131
- 69. 10-160 End-Tuned Two-Mast Inverted Vee 132
- 70. Two-Mast Vee Beam 133
- 71. Three- and Four-Mast Switchable Vee Beams 134
- 72. Two-Mast Rhombic 137
- 73. Short Squared Rhombic 138

APPENDIX I

- Antenna Noise Bridge 143

APPENDIX II

- How to Measure the Velocity Factor of Transmission Line With a Noise Bridge 145

APPENDIX III

- Cutting Half-Wave Sections of Transmission Line Using the Antenna Noise Bridge 147

APPENDIX IV

- Measuring the Resonant Frequency and Resistance of an Antenna With the Antenna Noise Bridge 149

APPENDIX V

- Cutting an Antenna to Resonance Using an SWR Meter 152

APPENDIX VI

- The Construction and Tuning of a Line Tuner 154

APPENDIX VII

- Antenna Tuner for Long-Wire Vees and Rhombics 159

APPENDIX VI

SECTION 1

The Construction and Tuning of a Line Tuner

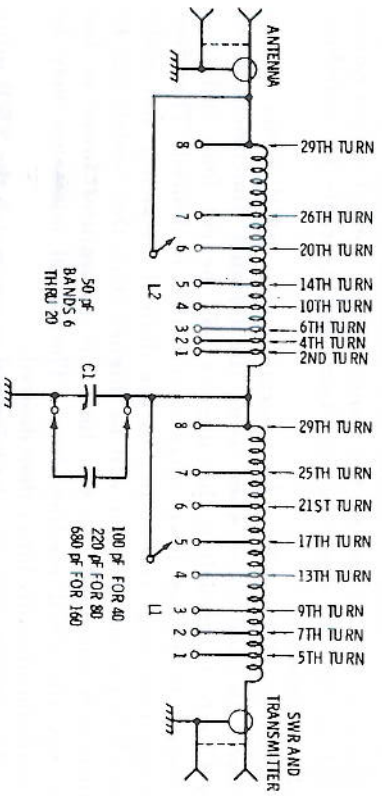


Fig. A-VI-1. Antenna line tuner.

- 2 binding posts
- 2 coaxial receptacles
- 1 case 10" X 5" X 4"
- 1 50-pf variable capacitor
- 1 100-pf mica capacitor
- 1 220-pf mica capacitor
- 1 680-pf mica capacitor
- 2 29 turns #14 wire, 1 3/4" dia. and 2 5/8" length (AIR DUX 1411)
- 2 r-f switches, 1 pole and 8 positions

Regular and Modified Dipole Antennas

APPENDIX V

Cutting an Antenna to Resonance Using an SWR Meter

The SWR meter and/or reflectometer arrangement have been used for years in checking out and monitoring ham antenna systems. Resonant antenna cuts can be made with the proper insertion of an SWR meter designed for the specific impedance of the transmission line. (For the usual SWR meter, optimum performance is obtained with 50- or 70-ohm coaxial lines.)

Two preferred arrangements are shown in Fig. A-V-1. True SWR measurements can be made by inserting the meter right at the antenna. Usually this is not a convenient arrangement. An alternative is to insert the meter one electrical half wavelength away from the antenna terminals or at some part of the line that is a whole multiple of an electrical half wavelength. The latter plan permits the SWR meter to be located near the transmitter. However, the very best accuracy in terms of the SWR reading and

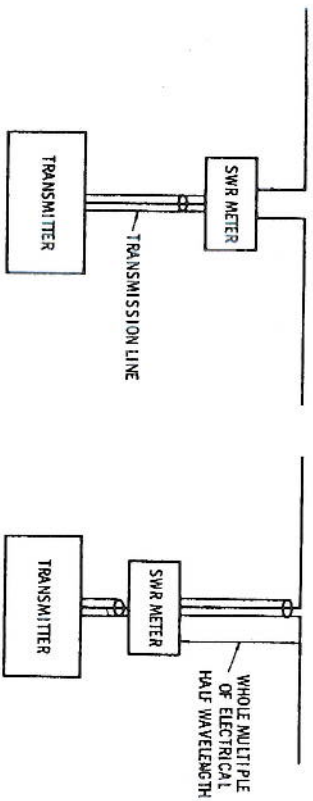


Fig. A-V-1. Measurement of SWR and antenna resonance.

in determining the resonant length of the antenna is feasible only when the exact length of line between the antenna and meter is a whole multiple of electrical half wavelengths. Under this condition the antenna terminal conditions are reflected to the meter and the reactive effects of the transmission line are reduced. The

1 — Half-Wavelength Dipole

As a starting point for the antennas discussed in this book, the half-wavelength dipole is considered to be the shortest long-wire antenna. Other long-wire types stem from this fundamental antenna dimension. In a dipole arrangement the transmission line is attached at the center (Fig. 1), and there is a quarter-wavelength conductor on each side of the feed point.

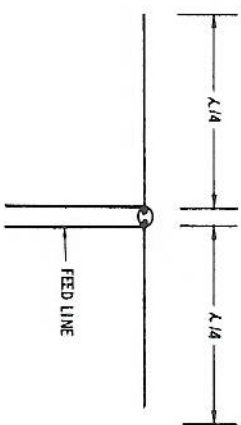


Fig. 1. Half-wavelength dipole antenna.

In free space and at most practical antenna heights the feed-point impedance is approximately 72 ohms. This can vary as a function of antenna height and the proximity of other conducting material.

The physical length of a dipole antenna is shorter than the calculated half wavelength of its resonant frequency. Thus the physical length of a dipole must be made shorter than the calculated free-space wavelength that corresponds to its resonant frequency.

A half wavelength ($\lambda/2$) in space has the following length:

$$\lambda/2 = \frac{492}{f \text{ MHz}}$$

The physical length of the dipole antenna needed to establish a resonant length for frequency (f) is shorter than this value

The bridge can also be inserted into the line an exact electrical half wavelength away from the antenna terminals. A third alternative is to locate the noise bridge at the receiver, making certain that the overall length of the transmission line between the antenna and the bridge is a whole multiple of an electrical half wavelength for which the antenna is to be cut and measured. The transmission-line cutting procedures were covered in Appendices II and III.

The recommended operating procedure is as follows:

1. Set the noise bridge dial to the anticipated resistance of the antenna (usually 50 or 70 ohms).
2. Tune the receiver over the frequency band and locate the noise null (minimum speaker noise or minimum S-meter reading).
3. Adjust the antenna-noise-bridge dial for the best noise null.
4. The resonant frequency of the antenna can be read from the calibrated receiver dial while the antenna radiation resistance is indicated on the calibrated noise-bridge dial.
5. The two controls can be adjusted slightly for the very best null and the most accurate reading.

The most accurate readings are obtained when the transmission line is a whole multiple of an electrical half wavelength.

In the measurement and cutting of both lines and antennas, the Charts 1 through 6 are employed. The physical lengths of lines and antennas indicated by the charts are invariably somewhat longer than the necessary cut for the desired resonant frequency. (Even the cut for a half-wavelength antenna using the end correction factor is usually a bit longer than necessary.) This is the favorable situation because the antenna or line can then be trimmed back to the desired higher resonant frequency.

Therefore, in using the antenna noise bridge, the null point is usually found lower than the desired operating frequency and may sometimes be even lower than the low-frequency end of the desired frequency band. You can then trim very carefully and observe the noise null rising higher toward the desired frequency.

As you well know, cutting a length that falls on the high side of the desired frequency presents the added problem of having to add on rather than trim off to reach the optimum frequency. This is certainly not the desired situation when using coaxial transmission line. Thus the chart and formula information in this book tends to give you a long dimension rather than a short one.

matched conditions and a good-quality line those losses can be quite insignificant for surprisingly long lengths of transmission line. Chart 1 presents dipole antenna dimensions for the radio amateur bands from 10 meters through 160 meters related to the center of each band, center of the phone segment, and center of the c-w segment.

The antennas described in this book were constructed variously of numbers 12, 14, and 16 wire, bare and insulated, with no significant differences in performance. In fact, insulated #14 was used extensively. Insulated wire provides an additional safety factor, can be run through trees, and is convenient for multi-conductor antenna applications.

Chart 1. Dipole and Half-Wavelength Line Dimensions

Band in Meters	Band Center		C-W Band		Phone Band	
	Ant.	Line	Ant.	Line	Ant.	Line
160	256'5"	178'1"	218'1"	178'1"	256'5"	178'1"
80	124'10"	86'8"	106'2"	89'	120'	83'4"
40	65'5"	45'5"	55'8"	45'9"	64'7"	44'10"
20	33'	22'11"	28'1"	23'1"	28'3"	22'9"
15	22'	15'4"	18'9"	15'4"	21'11"	15'3"
10	16'3"	11'3"	13'10"	11'6"	16'1"	11'2"

2 — Dipole Antenna, Line Tuned

A dipole antenna at resonance does not always present exactly 72 ohms impedance to the transmission line. Also the antenna impedance off of the resonant frequency is other than 72 ohms. Antenna height above ground and the presence of nearby conducting obstacles influence the antenna resistance too.

Transmission-line impedances other than 72 ohms are employed. Fifty-ohm coaxial lines are popular and there are a variety of accessories designed for 50-ohm operation. Although the mismatch of 72 ohms to 50 ohms is not great, such a mismatch plus other factors that influence antenna resistance can cause a significant standing-wave ratio on the line. Poor ratios should be avoided because many transmitters, especially modern transceivers, are quite critical as to loading.

A proper match at the transmitter end of the line is important for two reasons—proper loading of the transmitter, and efficient operation of the antenna system. A 50-ohm line can be used with a dipole antenna and quite often performs well; however, it is advisable to stay away from reactive loading of the transmitter

The velocity factor of some foam-type lines tend to be less than 0.81. Thus resonance will appear at the low end of the band, or even off the low end of the band. Trim the line patiently to bring it into the band. When the overall length of your line is a number of whole multiples of a half wavelength long, a larger section of line must be trimmed off to obtain a given change in overall electrical length than if line were only one half wavelength long.

Chart 1 gives half-wavelength line lengths of 0.66 and 0.81 velocity factors for the various amateur bands.

A very precise cut cannot always be made by calculation alone for the reason that velocity factors are not always exactly the stated values of 0.66 or 0.81 because of line discontinuities and other variables. The exact velocity factor can be obtained by measurement, or a line can be cut for a half-wavelength condition on some precise frequency. Techniques and procedures are given in Appendices I through V.

For multiband operation, compromise line lengths are used. In most cases a length can be found which provides a reasonable match on each band. Examples will be given for many of the multiband antennas in this book.

A good compromise length for 40-, 20-, 15-, and 10-meter operation, using VF-0.66 line, is a whole multiple of 45' 6". If 80-, 40-, 20-, 15-, and 10-meter operation is desired, use a whole multiple of 90'. When VF-0.81 line is used, a whole multiple of 56' provides good performance on 10 through 40 meters. Make it a whole multiple of 112' to include 80 meters.

An alternative plan is to employ a line tuner (Fig. 4). Such a tuner can accommodate a random length of line although it is still advisable to cut the line close to one of the half-wavelength

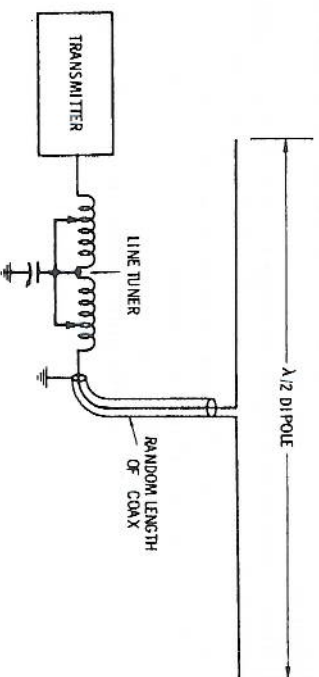


Fig. 4. Use of line tuner.

figures. An added advantage of the line tuner is that it can be used to tune the line over an entire amateur band or a group of bands by using tapped inductors and variable capacitors. Such a tuner can be adjusted to present the proper resistive load to the transmitter, and it tunes out reasonable reactive components so that they are not reflected to the transmitter.

The length of a quarter-wave segment of line or an odd multiple of a quarter wavelength can be determined in the same way with the exception that the far end of the line is opened rather than shorted.

A balun avoids these imbalances by serving as a balance-to-
unbalance transformer (Fig. 6). As such, it provides an efficient
transformation between the single-ended coaxial line and the bal-
anced dipole antenna. In matching a dipole to a coaxial line the

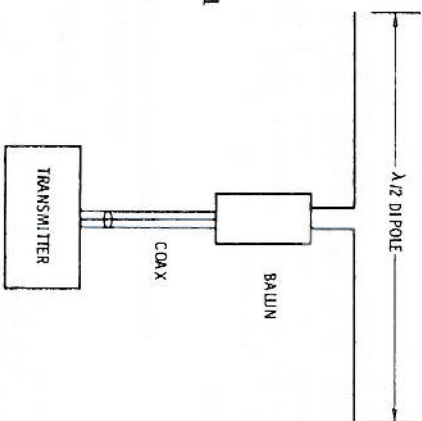


Fig. 6. Dipole antenna with 1 to 1 balun.

preferred balun transformation is one-to-one. Baluns of four-to-one and other ratios are feasible for matching higher antenna resistances to a 50- or 72-ohm coaxial cable.

A balun ensures more favorable line conditions and less disturbance of the antenna radiation pattern, and helps in establishing a more favorable standing-wave ratio over a wider span of frequencies, as compared to the dipole-direct-to-coaxial-line method of connection.

4 — Novice-Band Dipoles

Dipoles can be cut for optimum operation on the 80-, 40-, and 15-meter novice bands. Dimensions for novice-band centers are given in Chart 3. Optimum coaxial line lengths for half-wave segments of coaxial line are also given. Line lengths which are

Chart 3. Novice-Band Dipole and Line Dimensions

Novice-Band Centers	$\lambda/2$ Dipole Length	$\lambda/2$ Line Length—0.66 Regular Coax	$\lambda/2$ Line Length—0.81 Foam-Dielectric Coax
3.725 MHz	125'8"	87'3"	103'11"
7.175 MHz	65'3"	45'3"	55'6"
21.175 MHz	22'2"	15'4"	18'9"

The antenna or line to be measured is connected as the fourth leg of the bridge. The receiver is, of course, connected between the junctions of the two leg pairs. When the bridge is balanced, there is minimum signal applied to the receiver. This happens when the antenna resistance is of the same value as the setting of the bridge resistor. If reactive components are present, the bridge does not balance. Any such reactance is balanced out by tuning the receiver. In doing this you also determine the resonant frequency of the antenna system.

The general operating procedure is:

1. Set the bridge control to the appropriate antenna resistance that is to be expected; for many ham antenna systems that is 50 ohms.
2. Tune the receiver over the frequency band to which the antenna is to be resonated. Find the minimum noise frequency (minimum audio output from the speaker and minimum S-meter reading).
3. Adjust the bridge resistance for the best minimum (null). Jockey the receiver tuning and bridge controls slightly for the best minimum. The resonant frequency of the antenna system is read from the receiver dial, while the antenna radiation resistance is indicated on the noise-bridge dial.

The antenna noise bridge is a small test unit, is easy to hook up, and makes antenna system checking a lot easier.

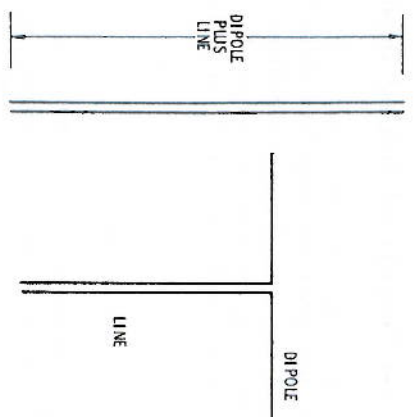


Fig. 7. Lamp-cord dipole.

In constructing such an antenna use a section of lamp cord which has a total length corresponding to the dipole *plus* the transmission line. Then it can be cut down the middle to form the dipoles. Electrical tape can be used to secure the point of separation (Fig. 8). The insulation need not be bared from the dipole because it does not hamper the radiation of the r-f energy. The ends of the dipole can be fed through the eyes of the insulators and secured with electrical tape.

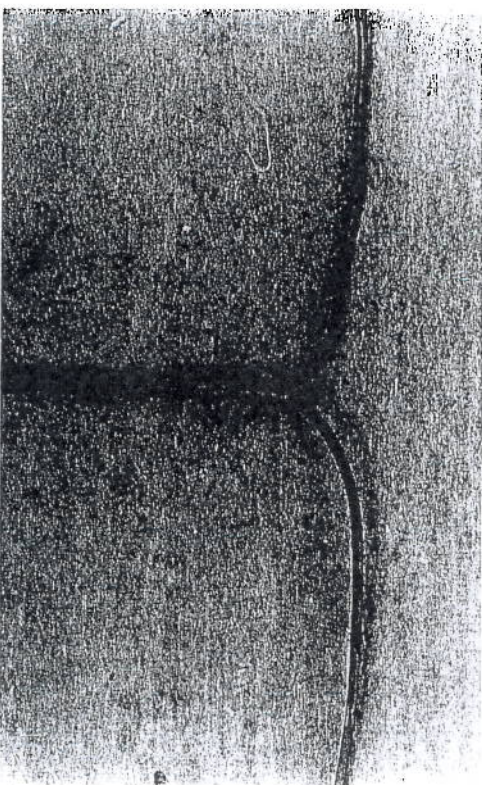


Fig. 8. Taping of lamp-cord dipole.

Such an antenna is serviceable for attic mounting. Since it is very flexible and consists of few components, it can be packed and stored conveniently, and serves well for quick portable installations.

The four-square mast installation is quite versatile and a variety of long-wire antennas can be constructed around this configuration. In this topic you learned how the four-square plan can be used for short switchable rhombic combinations. Previously in topic 71 it was used for switchable vee-beam antenna construction. Additionally, center-fed long wires can be placed in operation by using diagonal poles.

Longer two-mast rhombic antennas can be erected out of this basic plan, as shown in Fig. 99A. A choice of four possible directions can be made by coming out from the center of the hub. By establishing the feed point at one of the masts, four additional directions are made available as shown in Fig. 99 B. Refer to topics 1, 2, 57, 58, 59, 60, 61, 62, 63, 71, and 72.

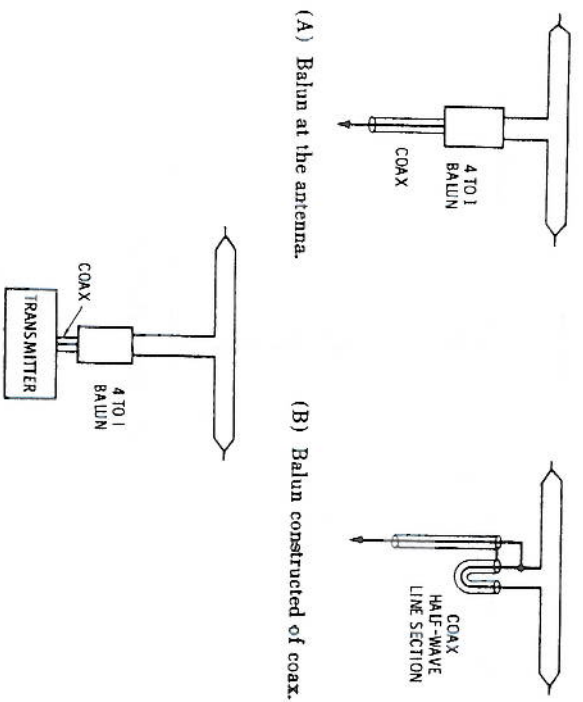


Fig. 10. Baluns and connection arrangements.

separation between folded dipole and transmitter. Of course, one must be more careful in laying out the 300-ohm feed line so that it does not come too close to conducting surfaces. Stand-off insulators must be used to hold 300-ohm line away from the mast, while in a well-balanced and matched system, one can tape coaxial line to a mast.

It is a good idea to make the span of 300-ohm line between the antenna and balun a multiple of a half wavelength. The balun can be positioned within a few feet of the transmitter, or at any convenient point—perhaps the position at which the line is to enter the house. Refer to topics 1, 2, 3, and 7.

9 — Inverted Dipole

The inverted dipole has been and is a popular antenna because of its good results, ease of erection, durability, low cost, and limited space requirement. The inverted dipole is, in effect, a conventional horizontal dipole with its ends tilted down toward the ground (Fig. 11). The angle between the two legs is usually between 90 and 120 degrees, depending on apex height and leg length.

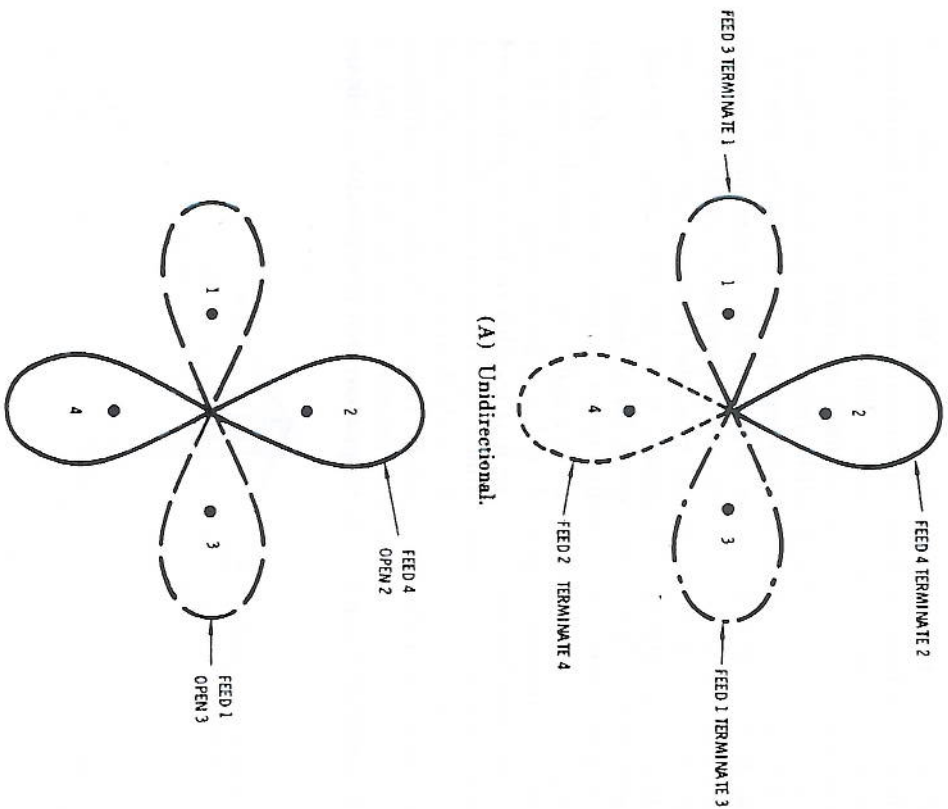


Fig. 98. Different modes of operation.

four unidirectional patterns in the direction of the four poles and also two sets of bidirectional operation. These combinations are shown in Fig. 98.

The positioning of the masts in relation to the antenna erection area should be selected rather carefully in accordance with favored DXing directions. If you can get within 20° to 25° of a desired bearing, you can do reasonably well because the beam angle of the short rhombic is rather wide. Orientation is much less critical than for the very long rhombics.

50- rather than 72-ohm line. Again, the most favorable conditions exist when the transmission line is made a multiple of a half wavelength at the operating frequency.

The performance of the inverted dipole is in general more uniform than the performance of a straight dipole. The horizontal pattern is less directive. Gain is less by comparison to the broad-side gain of a horizontal dipole of the same height, because the inverted dipole has its antenna legs tilted down toward ground. However, the performance of the inverted dipole, relative to other horizontal angles, equals or betters that of the straight dipole. Another advantage of the inverted dipole is its lower angle of radiation and more vertical polarization. Thus for long-distance communications especially on 7 MHz and higher, surprising results are obtained with the inverted dipole.

Only a single erection mast or high mounting position for the apex is needed. The inverted dipole ends can be brought very near to the ground and can be tied down to metal fence posts, the side of a garage, shed, etc. Dimensions for a 40-meter phone inverted dipole are given. Optimum transmission-line length is a whole multiple of $45'6''$. Refer to topics 1 and 2.

10 — Novice 15-40 Dipoles

More than one dipole can be attached to the same center feed point. If done properly, there can be minimum interaction and good operation on more than one band. For optimum results the two dipoles should be separated as much as possible from each other. It is best to have the elements of one dipole perpendicular to those of the other, rather than parallel (Fig. 12A). Thus, in erecting a 15- and 40-meter combination, the 15-meter wires should run broadside to the 40-meter wires. A further reduction in the interaction between the two dipoles can be obtained by using different polarization. In fact, a good-performing combination would be a 40-meter dipole and a 15-meter inverted vee (Fig. 12B). This combination has the 15-meter wires perpendicular to the 40-meter wires, and the 15-meter polarization has been changed away from that of the 40-meter dipole.

It has been said that the ordinary 40-meter dipole operates as a three-halves wavelength antenna on 15 meters. It is true that a 40-meter antenna often loads on 15 meters, but seldom can performance and standing-wave conditions on the transmission line be made as good as those obtainable when using a separate 15-meter dipole. The two frequency bands are not related properly for this optimum condition. In fact, a dipole cut for the low end

made quite convenient for switching over between open bidirectional and terminated unidirectional operation of the antenna. Of course, bringing the far end to a low level makes it convenient for end-tuning of the rhombic.

The practical short rhombic of Fig. 96 was compromised from the dimensions developed in topics 69 and 70. Unless the feed point can be located rather near to the transmitter, the use of open-wire transmission line and an antenna tuner is recommended for getting the most out of the short rhombic. With a 45-foot mast height, this antenna worked into all continents with ease. Its performance surpassed a three-element beam on 15. Also the antenna gives you low-band operating capability, including 160 meters.

The same idea can be used to construct a long rhombic antenna using the dimension information given in topics 57 through 63. Refer to topics 1, 2, 17, 57, 58, 59, 60, 61, 62, 63, 69, 70, and 71.

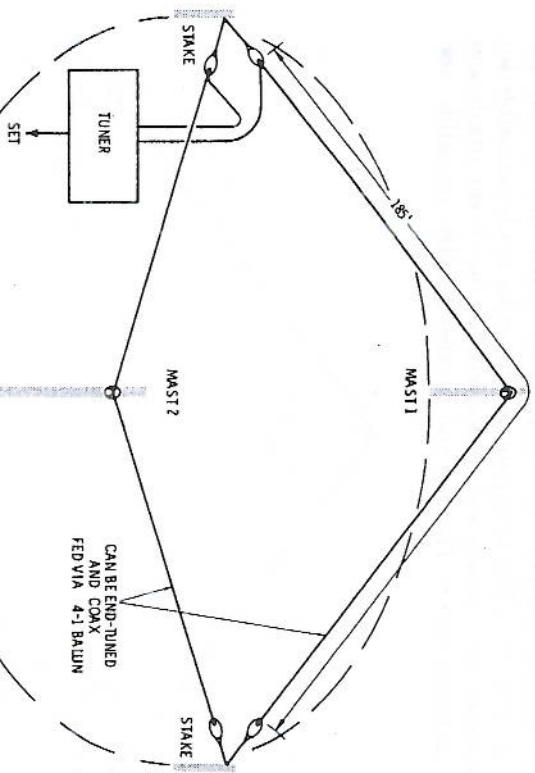


Fig. 96. Two-mast rhombic.

73 — Short Squared Rhombic

Do you have a plot of ground approximately 100-foot square for antenna erection? If so, an antenna mast mounted at each

angle radiation can be obtained on both bands. The 15-meter dipole wires should be at right angles to the 40-meter segments. Refer to topics 1, 2, 4, and 9.

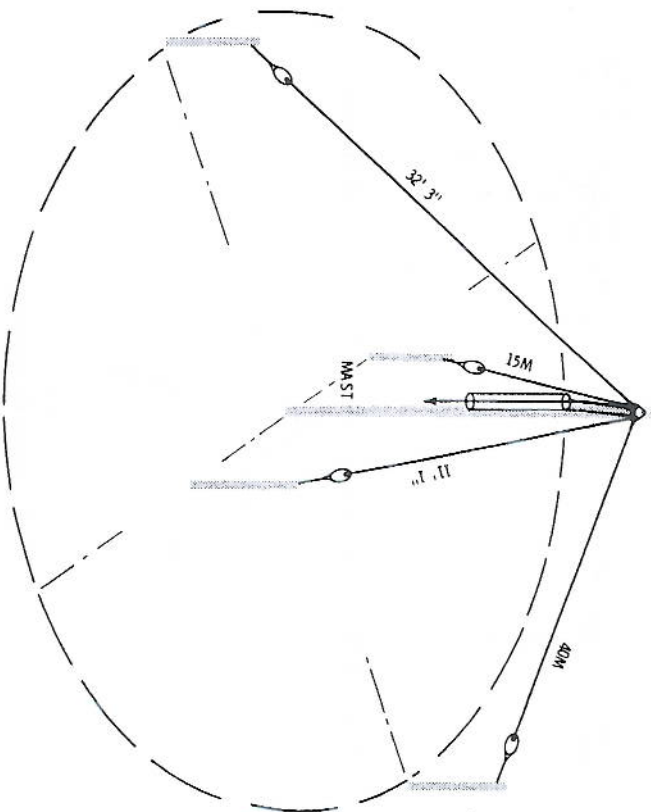



Fig. 13. 15-40 meter inverted dipoles.

11 — Novice 15-80 Dipoles


Just about optimum dipole operation can be obtained on 15 and 80 meters using two separate dipoles attached to the same center feed point (Fig. 14). There are three possible arrangements that give good performance. Both dipoles can be mounted horizontally and at right angles to each other; both can be mounted in an inverted-dipole combination; or the 80-meter antenna can be erected as a horizontal dipole, with the 15-meter elements coming off its center feed point as an inverted dipole. Refer to topics 1, 2, 4, 9, and 10.

12 — Novice 40-80 Dipoles

Near optimum operation can be obtained on 40 and 80 meters using two separate dipoles connected to the same center feed

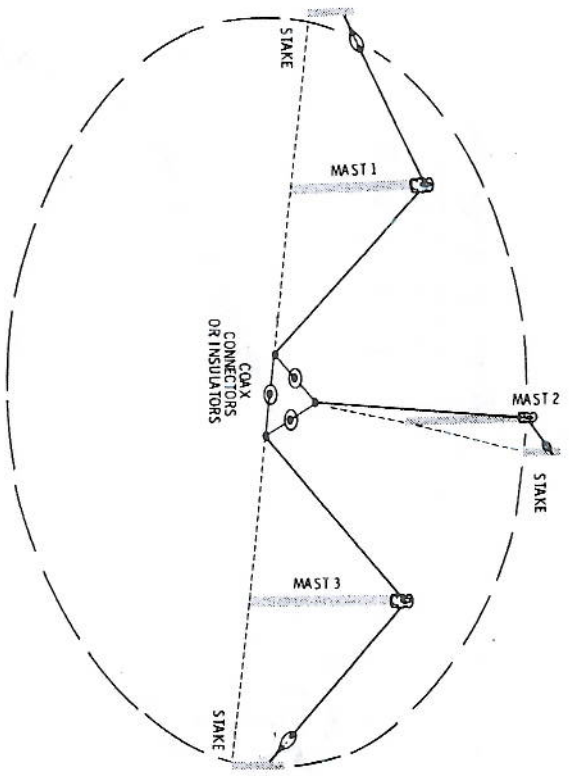


(A) Three mast.

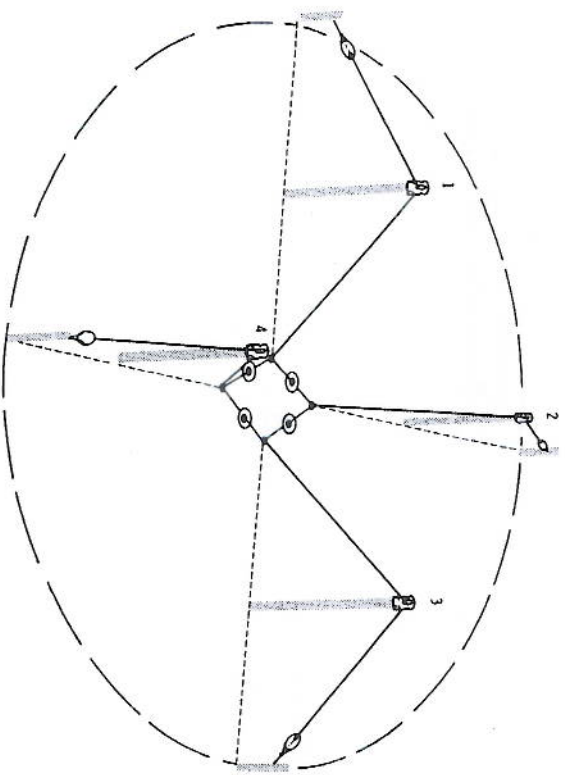


(B) Four mast.

Fig. 94. Switchable vee beams.

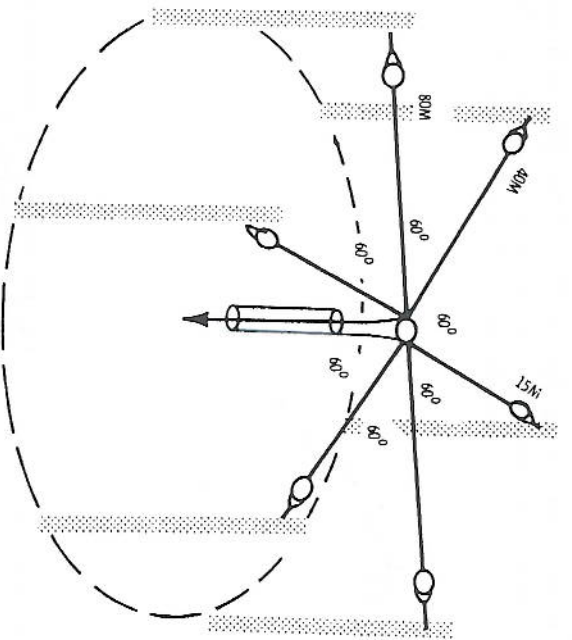

(A) Horizontal dipoles.

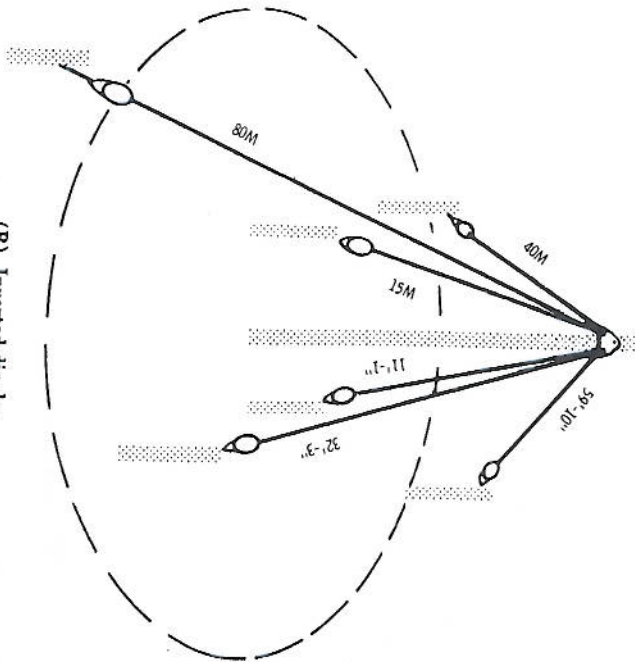

(B) Inverted dipoles.

Fig. 15. Novice 15-40-80 dipoles with common feed point.

An apex angle is selected in accordance with the number of wavelengths on each leg as per Charts 6 and 7. The feed point is brought down to a level where it becomes accessible for convenient changes. Likewise the antenna wire ends are brought down and made convenient for end tuning.

A practical version of this antenna using the dimensions of topic 69 was constructed as shown in Fig. 93. A compromise angle of 60° was selected for multiband operation. Somewhat better low-band performance can be obtained by increasing this angle up to approximately 90° . Directivity is still good on 10 and 15.

Dimensions for end tuning are given in Fig. 93A. For long lengths of transmission line an open-wire line and tuner are recommended as shown in Fig. 93B. The tuner of Appendix VII is ideal for 10-, through 80-meter operation. Refer to topics 1, 2, 17, 44, 51, 54, 68, and 69.

71 — Three- and Four-Mast Switchable Vee Beams

The vee-beam construction of topic 70 can be used to advantage in the construction of a switchable vee beam because the feed point and the wire ends can be brought down to a level that is accessible. At the feed point it is then convenient to connect the transmission line to any pair of antenna wires in accordance with the desired orientation of the beam.

In the three-mast arrangement of Fig. 94A the three masts are mounted in a triangle. They are spaced equidistantly from each other and separated from the center of the triangle by approximately half the distance of the antenna leg length. Therefore the separation between antenna wires is 120° which angle also becomes the apex angle of the vee-beam. By attaching the transmission line to the correct pair of antenna wires there is a choice of three directions of maximum radiation, spaced 120° apart. Mount the three antenna masts so that these maxima fall at the most favorable compass angles. Recognize that the angles of the maxima fall midway between the angular positions of the mast.

If coaxial transmission line is to be used the antenna wires can be end-tuned, and the feed point can consist of three coaxial connectors as shown in Fig. 94A. Use dimensions of Fig. 93 if desired. One need only connect the coaxial line to the appropriate connector to select the desired pair of antenna wires. The antenna wires can be terminated in a set of three insulators when open-wire line and antenna tuner are employed. The open-wire line is connected to the preferred pair of antenna wires. This latter arrangement also permits coaxial feed via a 4-to-1 balun.

these bands. A single antenna that permits rapid band changeover is a desirable attribute for these operators. If done properly three separate dipoles can be attached to the same center feed point and made to give optimum dipole operation on each of the three bands. The secret of good performance and low standing-wave ratios is to keep the dipoles isolated from each other as much as possible except at the feed point. The inverted-dipole style and its single supporting mast (Fig. 17) provides a good-performing arrangement in a small mounting area. The three dipoles are 60-degrees related relative to their physical positioning around the mast. This affords a higher order of isolation.

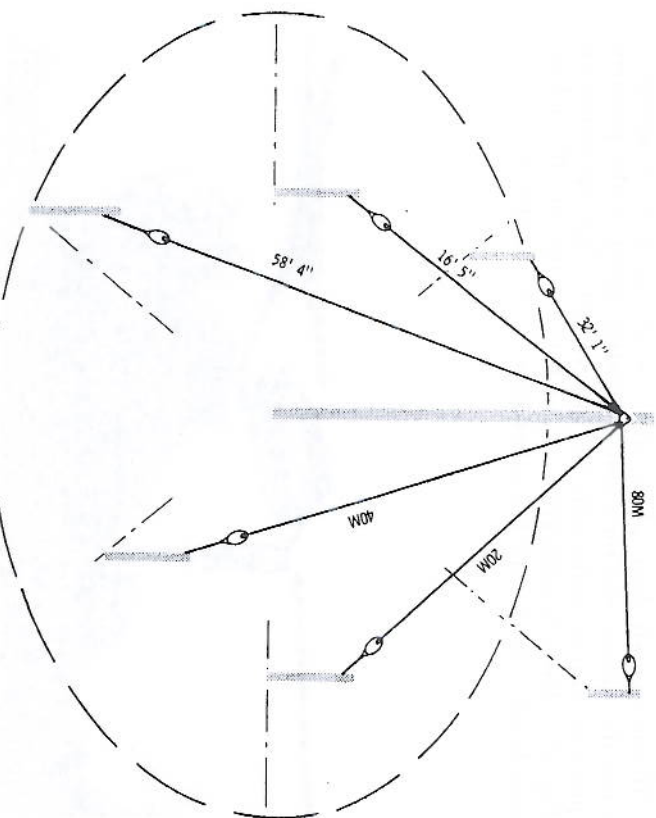


Fig. 17. 20-40-80 phone inverted dipoles.

Furthermore, the 80-meter wires stretch out more nearly horizontal while the 20-meter wires can be made the most vertical. Thus, there is some additional isolation through differing polarization, and at the same time, the more favored lower angle of vertical radiation can be obtained with increasing frequency.

Dimensions for a 20-40-80 phone antenna are given. Dipole ends are brought near the ground level and antenna resonance can be

of two masts permits the wires to have a significant vertical slope (Fig. 90).

Leg length corresponds to a quarter wavelength on 1.81 MHz. Coaxial transmission line can be used to feed the antenna and a good SWR is obtainable between 1.8 and 1.85 MHz. Some length adjustment may be necessary to set resonance at a desired frequency.

If the transmission line run is very long an open-wire line and 160-meter antenna tuner can be used. Also in conjunction with the antenna tuner of Appendix VII, multiband operation as a center-fed long wire is feasible. It has some of the characteristics of the inverted vee and does display some end directivity on the 10-, 15-, and 20-meter bands. Refer to topics 1, 2, 17, 22, 39, 61, and 67.

69 — 10-160 End-Tuned Two-Mast Inverted Vee

The two-mast inverted-vee construction also lends itself to end feed. Segments of antenna wire can be added to the basic 160-meter arrangement of topic 68 as shown in Fig. 91. Formula dimensions work out as follows:


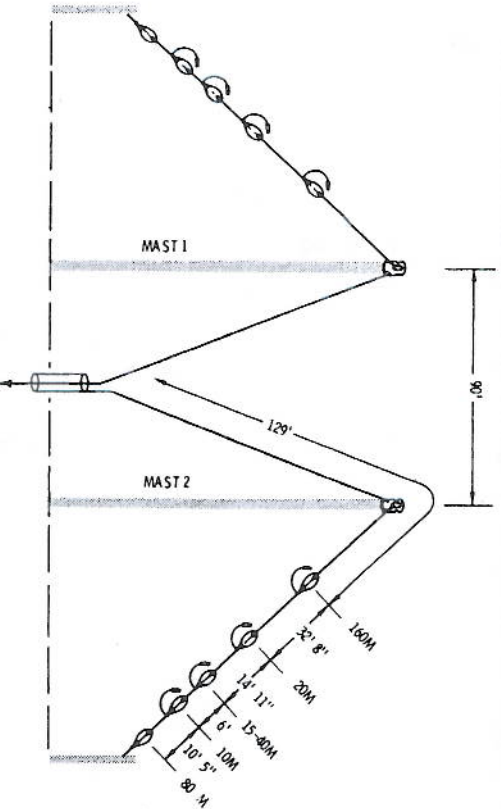


Fig. 91. Two-mast end-tuned inverted vee.

$$(80) \text{ Leg length} = \frac{738}{3.8} = 194 \text{ feet}$$

rent, or high-impedance point. Therefore a high-impedance transmission line must be used, or some sort of tuner is necessary to make the transformation from the low-impedance line to the high-impedance feed point.

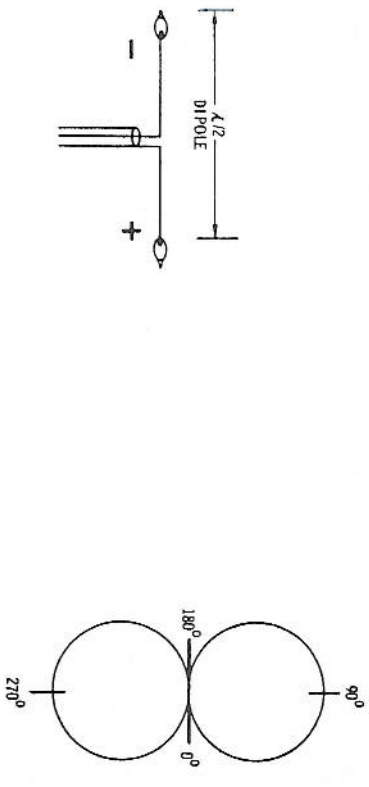


(A) Half-wave dipole.

(B) Full-wave dipole.

Fig. 19. Comparisons in length and horizontal pattern of horizontal dipole and one-wavelength antennas.

Often this type of antenna is called two half wavelengths in phase as indicated by the polarities (in Fig. 19). The fields of the two horizontal half-wave segments interact to form a cloverleaf horizontal radiation pattern, instead of the figure-eight of a single half-wavelength dipole antenna (Fig. 19B). Note that radiation maxima occur at 55°, 125°, 235°, and 305° instead of the 90° and 270° of a horizontal dipole. Each of the four lobes of the one-wavelength antenna show a slight improvement in gain over the two-lobe maxima of the dipole. Of course, each lobe has a somewhat narrower beam angle than a dipole lobe.

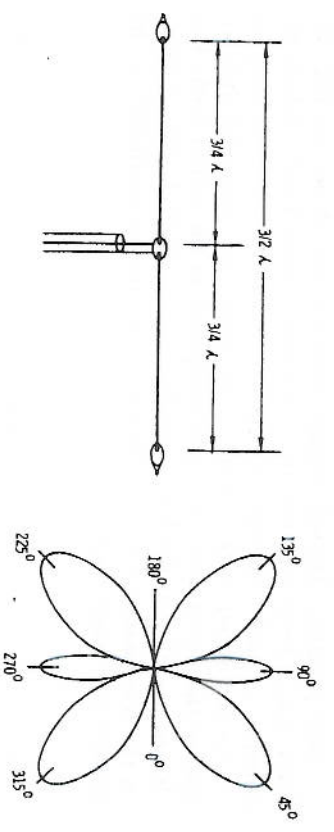

(A) Basic construction. (B) Radiation pattern.

Fig. 21. 3/2-wavelength horizontal antenna and horizontal pattern.

Chart 5 provides the necessary constants for calculating leg lengths that are an odd multiple of a quarter-wavelength long. The constant for a quarter wavelength (half-wavelength dipole) is corrected for end effect. End effect has a decreasing influence with an increase in the number of quarter wavelengths on a leg. There is some shortening required. It is wise to cut the antenna lengths slightly long in accordance with the constants given. One can then trim back to establish the desired resonant lengths. Refer to Appendices I through V.

Chart 5. Leg Lengths in Quarter Wavelengths and Feet

Leg Length in Wavelengths	Leg Length in Feet (f in MHz ²)
1/4	234/f
3/4	738/f
5/4	1230/f
7/4	1722/f
9/4	2214/f
11/4	2706/f
13/4	3198/f
15/4	3690/f
17/4	4182/f
19/4	4674/f
21/4	5166/f
23/4	5658/f
25/4	6150/f
27/4	6642/f
29/4	7134/f
31/4	7626/f
33/4	8118/f
35/4	8610/f
37/4	9102/f
39/4	9594/f
41/4	10086/f

with insulation as a safety feature. Such insulation does not have any adverse influence on the antenna radiation. Refer to topics 1, 2, 31, 33, 34, 35, 36, 63, 65, and 66.

67 — Long-Path Short-Path Long-Wire Antenna

The center-fed long-wire antenna is bidirectional off its far ends. The longer the antenna, the sharper is the bidirectional pattern and the higher is the antenna gain off the ends. Such a bidirectional antenna pattern is advantageous in those sites where the preponderance of contacts are from two opposite directions. Furthermore the bidirectional antenna can provide both long-path and short-path communications by way of the same fixed-position antenna.

Three possible arrangements are shown in Fig. 89. For operation on 10 and 15 meters alone, a dimension can be selected that permits two-band operation. A four-to-one balun and coaxial transmission line can be used. If other bands are to be added, the antenna can be end-tuned. Bring each of the legs down sharply from the end support masts to make band changing convenient. The 10-15-20 and 10-15-20-40 combinations are shown.

If a long length of transmission line is necessary, the use of open-wire line minimizes line attenuation. A tuner (Appendix VII) is recommended and permits the antenna to be used on all frequencies in all bands. Such an antenna also performs well on 160 meters. An ideal tuner for 160-meter operation has been detailed by Lewis G. McCoy in May 1969 *QST*. In fact, coaxial line can be run from the outdoor end of a long-wire antenna to the transmitter. The grounded braid of the coaxial line helps to keep rf out of the shack, often a problem with random end-fed wires. Refer to topics 1, 2, 17, 32, 54, 61, 62, and 63.

shown in Fig. 23 these would be favorable directions for Europe, North Africa, South America, Australia and New Zealand, and Japan and the Far East respectively. The two minor lobes would be in the directions of the western states and South Africa. Mount the antenna 0.5 to 1.0 wavelength above ground for good low-angle vertical radiation.

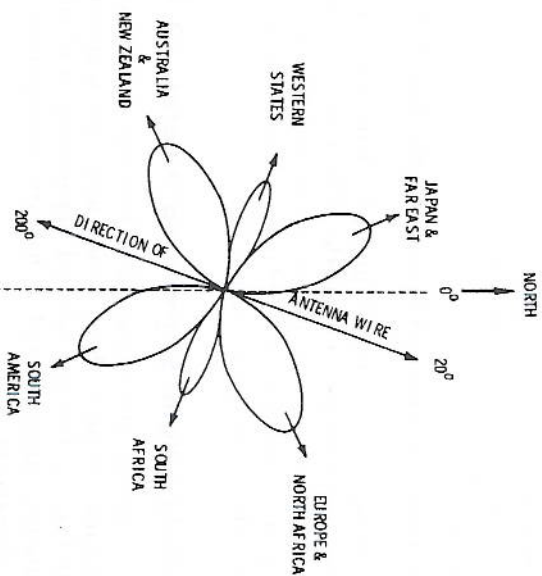


Fig. 23. Orientation of antenna in favored directions.

End-feeding on the 20-degree side favors the 155-degree and 245-degree lobes while end-feeding on the 200-degree side would favor the 65- and 335-degree lobes. Refer to topics 1, 2, and 16.

18 — Low-Band Segmented Dipoles, 40-80-160

Three separate dipoles for 40, 80, and 160 require considerable space, antenna wire, and transmission line. As a result few stations have optimum antenna systems for operation on the three low bands. Such operation can be provided with a single antenna if space is available for 160-meter dipole erection. A single antenna and a single transmission line can provide three-band facilities.

The segmented arrangement with insulators and jumpers is shown in Fig. 24. A simple halyard arrangement at one end can let the antenna down to make the necessary jumper connects or disconnects when operation on another band is desired. The dimensions shown permit operation as a dipole on 80 or 160 meters and operation as a 3/2-wavelength antenna (three-quarter wavelength legs) on 40 meters. Preferred transmission-line lengths

High mounting of the long legs provides a low vertical angle for good DXing—wonderful, if you can get up 70 feet. The multiple lobes provide good omnidirectional results, and at the same time there is an exceptional performance peak off the far ends.

Dimensions of a practical antenna (Fig. 87) were established using the formula values calculated previously for the long-wire antennas of topics 63 and 64. Three such long-wires permit operation on five bands without the use of a tuner. Refer to topics 1, 2, 17, 44, 63, and 64.

65 — All-Band, 6-160 End-Fed Very Long Wire With Tuner

A very-long antenna wire in conjunction with the tuner of Appendix VI modified for 40-, 80-, and 160-meter end-fed use as in Fig. 88 permits you to use a long-wire antenna of a maximum

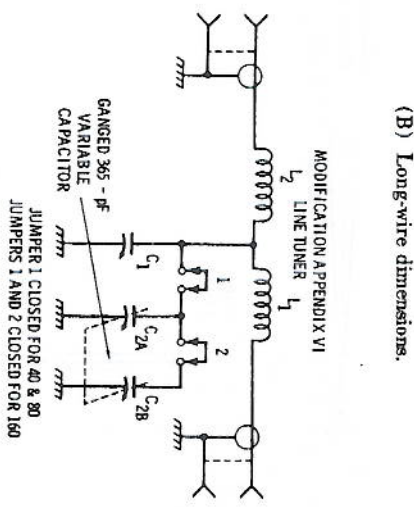
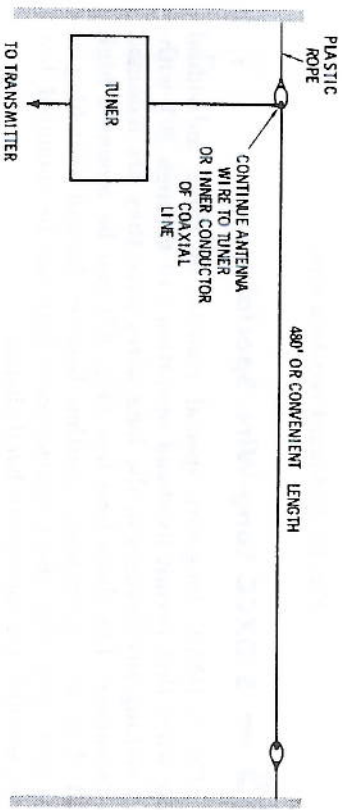


Fig. 88. Convenient very-long wire length.

In arrangement A the overall length accommodates 80-meter dipole operation. The antenna is also segmented to provide 40-meter dipole operation. On 20 meters the antenna operates as a three-halves wavelength (three-quarter wavelength legs).

If additional space is available, antenna B can be operated as a dipole on 80 meters, a 3/2-wavelength long wire on 40, and a 5/2-wavelength antenna on 20.

Careful consideration of the direction of the antenna wire can help you align the lobes in preferred DX directions. Refer to topics 1, 2, 17, and 18.

20 — Open-Wire Two-Band Dipole

Open-wire transmission line, suitably cut, can be used to construct two-band antennas. The 450-ohm type is preferable because of the greater separation between conductors.

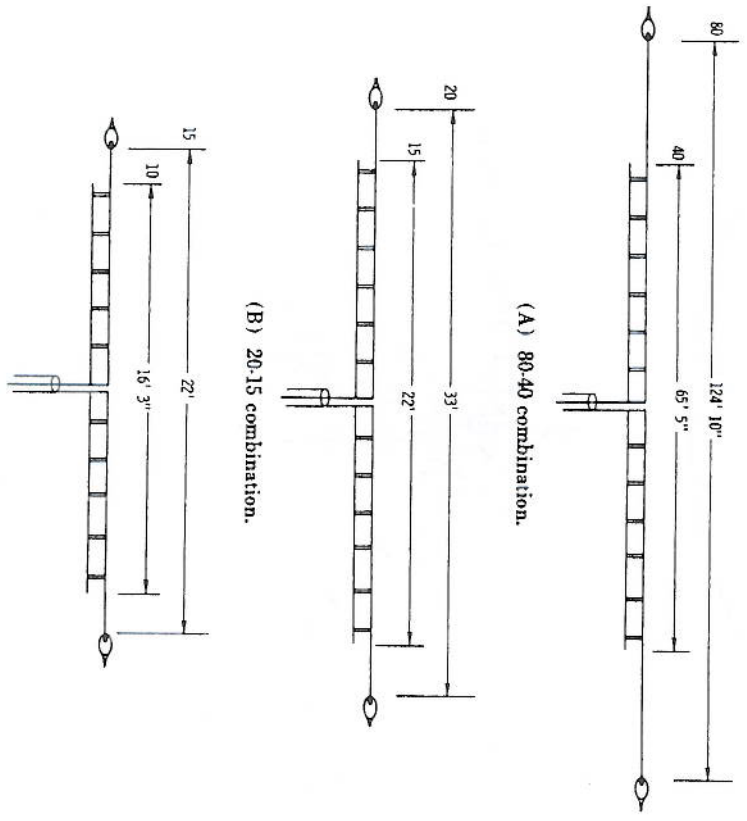


Fig. 26. Open-wire two-band dipoles, band-center dimensions.

The long leg can be broken as shown in Fig. 86. A 20-meter short-leg segment must also be added. However the far end jumper need only be changed when making a changeover between 10- and 15- or 20-meter operation.

If an SWR no greater than 2.5 to 1 is tolerable on 20 meter side-band (lower on c-w), the long-leg length as used for 10- and 15-meter operation can also be used on 20. In this case only the short near-end jumper need be changed. The 40- and 80-meter bands can also be added to permit five-band capability. A line tuner can be used to further reduce the SWR at the transmitter if desired.

Formula calculations indicate a cluster of resonant lengths for all seven bands for a long-leg length of approximately 700 feet. The end of the long leg is brought down rather sharply from the end support mast for convenient band changes, permitting the bulk of the long leg to be kept high and clear as is advisable for good low-angle radiation.

Formula values are:

$$(10) \text{ Long-leg length} = \frac{20418}{28.6} = 713 \text{ feet}$$

$$(15) \text{ Long-leg length} = \frac{10086}{21.3} = 710 \text{ feet}$$

$$(20) \text{ Long-leg length} = \frac{9594}{14.2} = 675 \text{ feet}$$

$$(40) \text{ Long-leg length} = \frac{5166}{7.25} = 712 \text{ feet}$$

$$(80) \text{ Long-leg length} = \frac{2706}{3.9} = 694 \text{ feet}$$

$$(160) \text{ Long-leg length} = \frac{1230}{1.825} = 673 \text{ feet}$$

It should be noted that for 10-, 15-, and 40-meter operation, the lengths are approximately the same, and one end-tuning position handles these three bands. Likewise 20- and 160-meter resonances are about the same and only one length is needed. A separate length is required for 80 meters. It should also be noted that there is a 10-meter resonance near the 80-meter length.

$$(10) \text{ Long-leg length} = \frac{19926}{28.6} = 696 \text{ feet}$$

The 40-80 combination has long been a popular duo. The longer wire serves as a half-wavelength dipole on 80; the shorter one, serves as a dipole on 40. Other pairs and appropriate dimensions are given in Fig. 26. The dipoles can be cut to a favored section of each band. It is preferable to use a length of transmission line which is a multiple of an electrical half wavelength. Refer to topics 1 and 2.

21 — Extra and Advanced Open-Wire Inverted Dipoles

Open-wire line can be used in the construction of two-band inverted dipoles (Fig. 27A). Various dipole pairs, as discussed in topic 20, can be constructed. Dipole lengths are shorter than formula values as a function of apex height and nearness of the antenna end to ground. Practical dimensions for 80- and 40-meter phone band operation are given.

Two such open-wire inverted dipoles mounted perpendicular to each other function well as a four-band antenna (Fig. 27B). The dimensions given in B are for c-w operation in the extra and advanced portions of the 15-, 20-, 40-, and 80-meter bands. Individual antennas can of course be cut for a specific portion of any one of the bands. Refer to topics 1, 2, 9, 13, 14, and 20.

An excellent 10-15 meter combination has an electrical length of $55\frac{1}{4}$ wavelengths on 10 and $41\frac{1}{4}$ wavelengths on 15:

$$(10) \text{ Long-leg length} = \frac{13530}{28.6} = 473.1 \text{ feet}$$


$$(15) \text{ Long-leg length} = \frac{10086}{21.3} = 473.5 \text{ feet}$$

The short sides are calculated from the basic dipole equation:


$$(10) \text{ Short-leg length} = \frac{234}{28.6} = 8.53 \text{ feet}$$

$$(15) \text{ Short-leg length} = \frac{234}{21.3} = 10.98 \text{ feet}$$

Practical dimensions for the antenna are given in Fig. 85. It is wise to cut the very long long-wire antennas eight to ten feet longer than formula value and trim back from this length. A

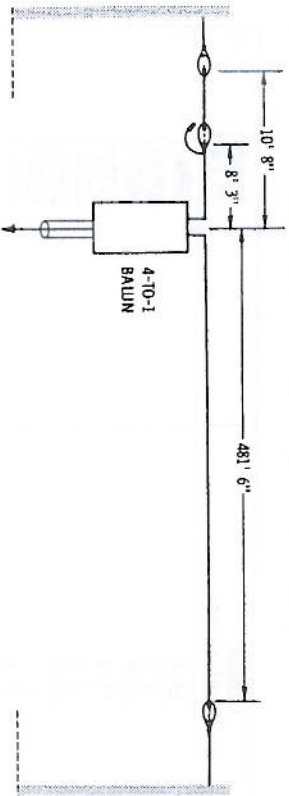

(A) Two-band, 10-15.

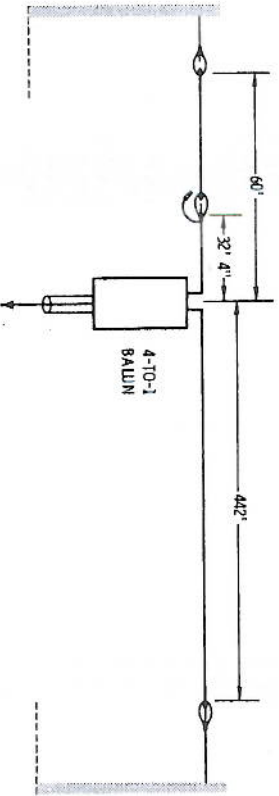

(B) Two-band, 40-80.

Fig. 85. Practical dimensions for two-band very long long-wire antennas.

SECTION 2

Inverted-Vee Antennas

22 — Center-Fed Monoband Inverted Long-Wire Vees

All antennas require a support structure and transmission line. This expense is a part of each antenna system. To this must be added the cost of the antenna proper. If it is made of antenna wire and assorted insulators, it amounts to a low-cost antenna. Such is the case for the long-wire inverted vee's. Another economy of this construction is that only a single mast or high point of erection is needed.

The inverted-vee construction is also less directional than the horizontal dipole or straight long-wire antenna. As the legs become more vertical, the horizontal radiation pattern becomes less directional. There is a loss in gain, too, as compared to the sensitive direction of the horizontal long wire. However, even this is overcome to some extent, especially for high-band operation and long-distance communications, because of its lower vertical angles of radiation.

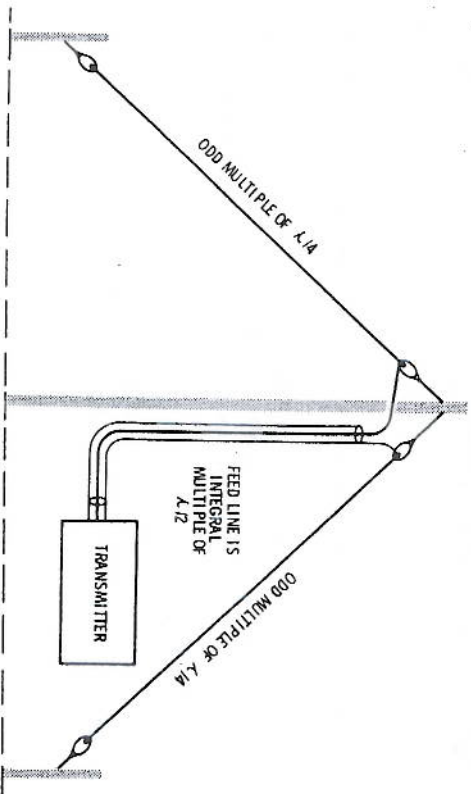


Fig. 28. Basic plan of a resonant and matched long-wire inverted vee.

23 — Two-Band Inverted Long-Wire Vees— No Tuning

By choosing proper leg lengths for an inverted-vee antenna a single pair of wires can provide good performance on two bands. For example the length of an 80-meter inverted dipole is such that it will also resonate as a 7/2-wavelength antenna on 10 meters. Using the information of Chart 5, topic 17, the following formula values are obtained:

$$(80) \text{ Dipole leg length} = \frac{234}{3.9} = 60'$$

$$(10) \text{ Long-wire vee leg length} = \frac{1722}{28.6} = 60' 3''$$

In the practical situation the legs must be shortened from this value as shown in Fig. 30. In cutting antenna legs always use the values calculated from the chart. You can then shorten the legs with the antenna erected to set resonance on a desired frequency. In the case of two-band operation you must keep close watch on the resonance points in both bands. Inasmuch as the leg length has a more decided influence on the higher frequencies, it is wise to be conservative in trimming off the ends as you watch the change in resonance on the higher-frequency band. The dim-

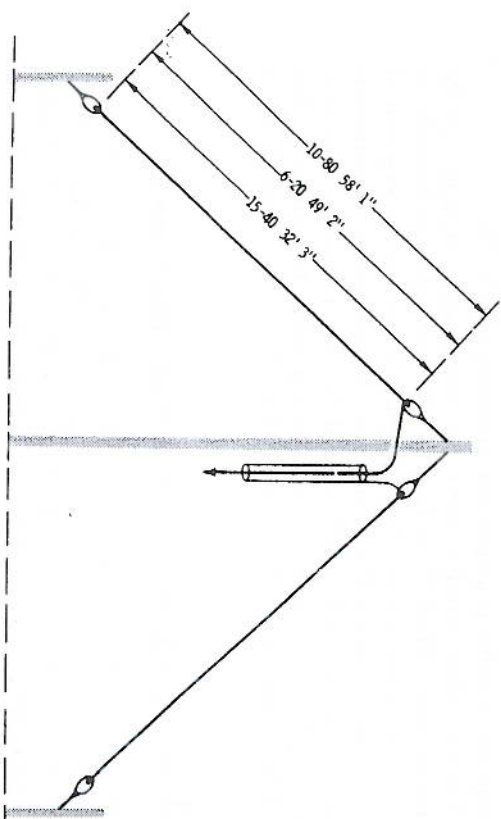


Fig. 30. Two-band inverted vee's.

The antenna tuner of Appendix VII could be mounted in a weatherproof housing at the base of the feed-point mast. A 50-foot section of 450-ohm open-wire line links the rhombic feed point to the tuner. In this latter plan, there is some loss in the coaxial line to the set if the line is very long. Refer to topics 1, 2, 17, 44, 54, and 57.

62 — Terminated Rhombic

The resonant rhombic is a bidirectional antenna. However the rhombic can be made unidirectional by employing a resistive termination at the far end of the antenna (Fig. 83). The characteristic impedance of the rhombic configuration approximates 800 ohms and if a resistive termination of 800 ohms is placed across the far end, the rhombic itself becomes nonresonant. (This is similar to the termination of a transmission line in its characteristic resistance.)

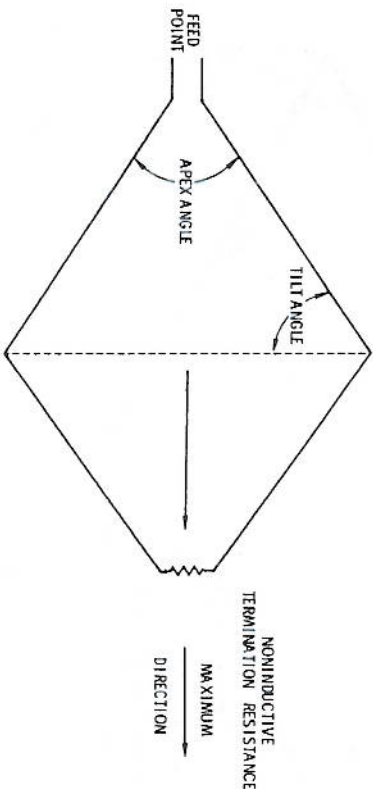


Fig. 83. Basic terminated rhombic.

When the rhombic is terminated properly, the antenna resistance at the feed point also approximates 800 ohms over a wide span of frequencies. The terminated rhombic has maximum directivity along the bisector line extending from the feed point toward the terminated end as shown in Fig. 83.

The termination must be resistive, and noninductive resistors are required. The power that must be dissipated by the resistors approximates one half of the power applied to the input end of the rhombic. For amateur use it is usually economical to employ a network of resistors of low power rating. The network used to terminate the practical rhombic of Fig. 84 consisted of 20 five-watt 600-ohm noninductive resistors connected in a series-parallel

In the previous topic 23 it was shown how a compromise length permits two-band operation. Exact-resonance frequencies can be obtained by cutting one length of line to the desired frequency in one band. Then, add on a short segment of line to establish the desired resonant frequency in the second band. This requires that the alligator clip be either connected or disconnected depending on the desired band of operation. This change-over, of course, can be done very conveniently because the leg ends are tied down at near ground level.

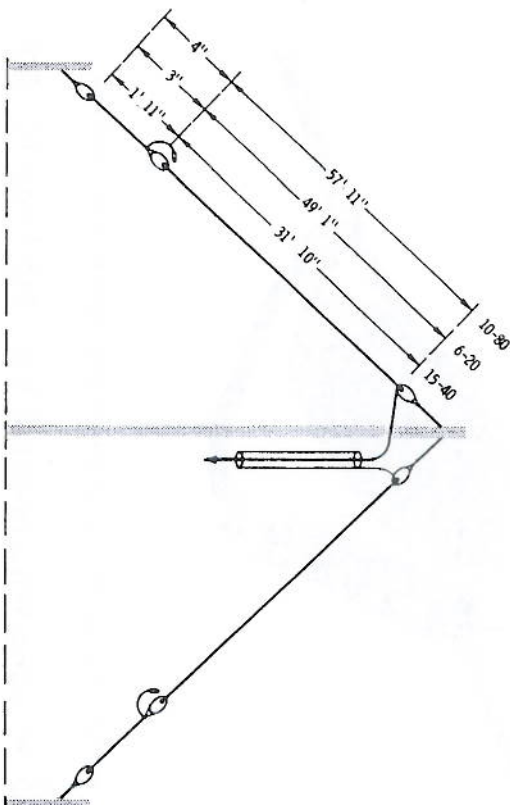


Fig. 31. Two-band inverted vee's, end-tuned.

Formula dimensions were given in the previous topic. The dimensions of Fig. 31 were planned for phone-band operation. In the case of the 15-40 antenna, the alligator clip would be open for 40-meter phone operation. Closing the two pairs of clips adds an additional 1' 11" to the antenna for optimum operation in the 15-meter phone band. If a 6-20 two-band combination is erected, the alligator clips are not connected for 20-meter phone operation. However, an additional 3" length is connected for operation on the 6-meter band.

For the 10-80 meter pair the clips are disconnected for 10-meter operation. For 80-meter phone-band operation, the two clips are connected.

The advantage of this manner of two-band inverted-vee operation is that the antenna can be peaked for optimum performance at any specific frequency within each band. The disadvantage is

The additional length of line needed to resonate the rhombic on 40 meters can be attached at the termination end where it is brought near to ground level (Fig. 80). An added length of 40 feet does the job. On 40 meters the leg length is just about 1.5 wavelengths and the apex angle is substantially smaller than the recommended value. This raises the wave angle, which is not altogether objectionable for 40-meter operation and general performance is quite good. Refer to topics 1, 2, 35, and 57.

60 — Two-Wire 10-15-20 Rhombic

Two resonant sections, one for 10- and 15-meter operation and the other for 20 meters, can be erected for three-band operation without the use of a tuner. In a practical version of this rhombic idea (Fig. 81), a side length of 329 feet was used for 10- and 15-meter sideband operation, while shorter sides of 322 feet established resonance in the sideband section of 20 meters.

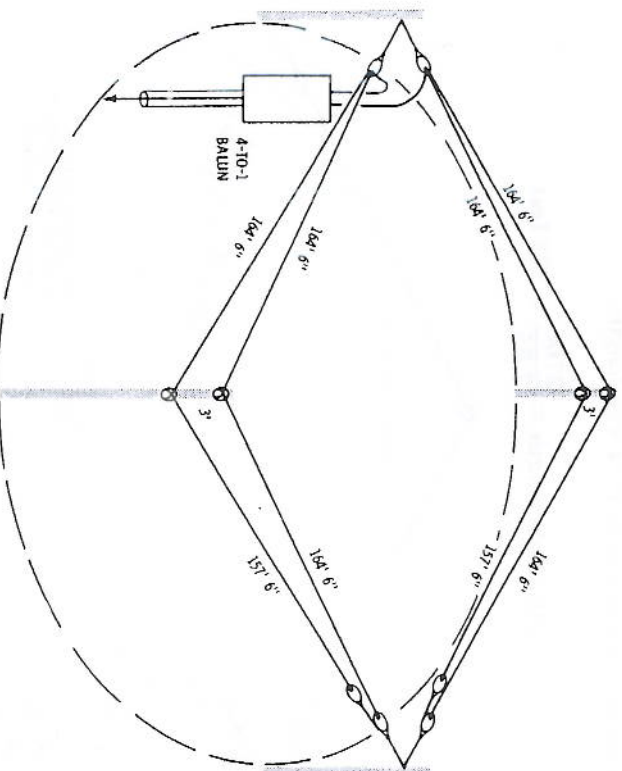


Fig. 81. Two-wire 10-15-20 resonant rhombic.

If desired, the same idea can be used to cut the resonant sides into the c-w portions of the three bands. Refer to topics 1, 2, 47, 57, and 59.

$$(10) \text{ Leg length} = \frac{1722}{28.6} = 60.2'$$

Note that the difference spread is less than nine feet. Appropriate sections of wire for attachment to antenna ends can permit multi-band operation.

This antenna was constructed, and resonances at the desired frequencies were obtained with the dimensions given. Each antenna end includes three insulators and appropriate wire sections. Alligator clips (Fig. 32), or other means of interconnection are used to bridge across the first two insulators to permit operation on appropriate bands. Operation on 20 meters is accomplished by opening the chips nearest to the center feed point. With chip closed at the first insulator and open at the second on each leg, it is possible to obtain 15-meter operation. Finally with both pairs of chip connections closed, 10-meter operation is obtained. In this latter mode we also have a bonus in the form of 75-meter sideband operation as a simple inverted-vee dipole.

Of course, with the proper selection of frequencies and lengths, acceptable operation over each of the three bands can be obtained. An alternate plan is to cut to the high end of each band and use small clip-on sections to tune to any frequency on any band as shown in Fig. 18.

A length of transmission line must be selected to accommodate the three bands. Here again it is possible to come up with combinations that provide half-wavelength resonant lengths on the various frequencies, which, at the same time, are very near to each other in overall physical length. Trial substitutions using Chart 2 locate the following possibilities:

$$(20) \text{ Line length} = \frac{1950}{14.3} = 136' 4''$$

$$(15) \text{ Line length} = \frac{2925}{21.3} = 137' 4''$$

$$(10) \text{ Line length} = \frac{3900}{28.6} = 136' 4''$$

Cutting the transmission line to 137 feet provides fine matching on all three bands. Refer to topics 1, 2, 9, 17, and 22.

26 — All-Band 6-160 Inverted-Vee

Additional bands can be added to the basic inverted-vee construction of Fig. 33 by providing additional leg lengths. Top-band

mitter on other segments of the same two bands. This antenna also functions with a low standing-wave ratio at the low end of the 20-meter c-w band. The addition of the line tuner permits the antenna to be operated over the entire 20-meter band (c-w and phone).

The total length of each side of the rhombic (twice the leg length) is such that each side is $19\frac{1}{4}$ wavelengths on 20 meters.

$$(20) \text{ Side length} = \frac{4674}{14.25} = 328 \text{ feet}$$

The tuner can be positioned at the transmitter or just below the feed point of the antenna (Fig. 78). In the latter arrangement a 45-foot length of coaxial line was connected between the feed point and the tuner, permitting the tuner to be mounted at the base of the mast. This is a good plan because it minimizes the loss on the transmission line that must run between the tuner and the transmitter. A disadvantage of the plan is the fact that retuning is necessary when changing bands or tuning from one end of the band to the other. Also a weatherproof housing is needed. Refer to topics 1, 2, and 57.

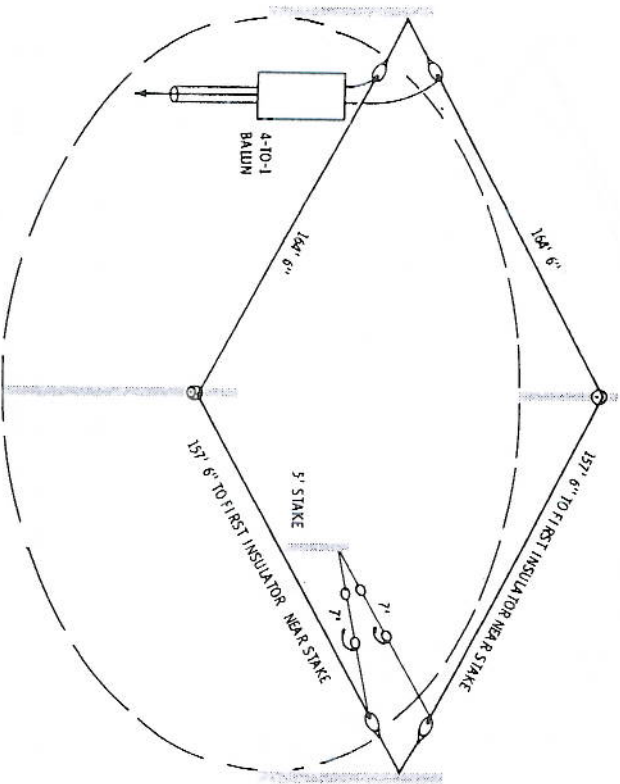


Fig. 79. 10-15-20 end-tuned rhombic.

three-quarter-wavelength operation on 40 meters. (As a bonus, this length also is a quarter-wavelength multiple of the 6-meter band). A further addition of somewhat less than 30 feet provides proper loading for 160-meter operation as a dipole.

In summary, all-band operation is possible with a single 35- to 45-foot mast in a space under 125 feet. Only one transmission line is needed, and no antenna tuner is required. The antenna operates as an inverted dipole on 80 meters, a modified inverted dipole on 160 meters, and as a long-wire inverted vee on the remainder of the bands. It is indeed a very inexpensive antenna despite its good all-band performance. Be careful in cutting the lengths, and be patient in tuning on each band, starting on 20 meters (shortest span), and continuing on through 160 meters (longest span). Refer to topics 1, 2, 9, 17, 22, and 25.

27 — 15-40 Novice Inverted Vee

The novice segments are so positioned in the 15- and 40-meter bands, that it seems plausible for a 40-meter dipole to also load on the 15-meter band, if dipole length can be cut in such a manner so that acceptable performance can be obtained on each band. This does not mean that optimum performance and the most

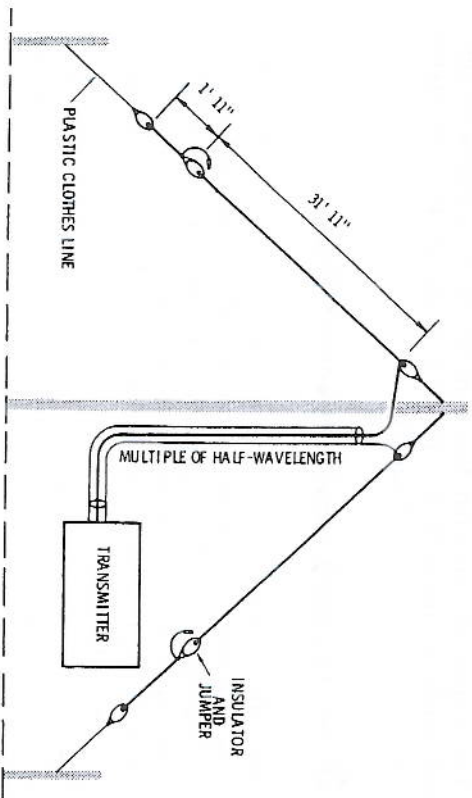


Fig. 35. Novice 15-40 inverted-vee antenna.

favorable line conditions can be obtained on each band. One can either favor one band or the other, or accept operation somewhat less than optimum on each band.

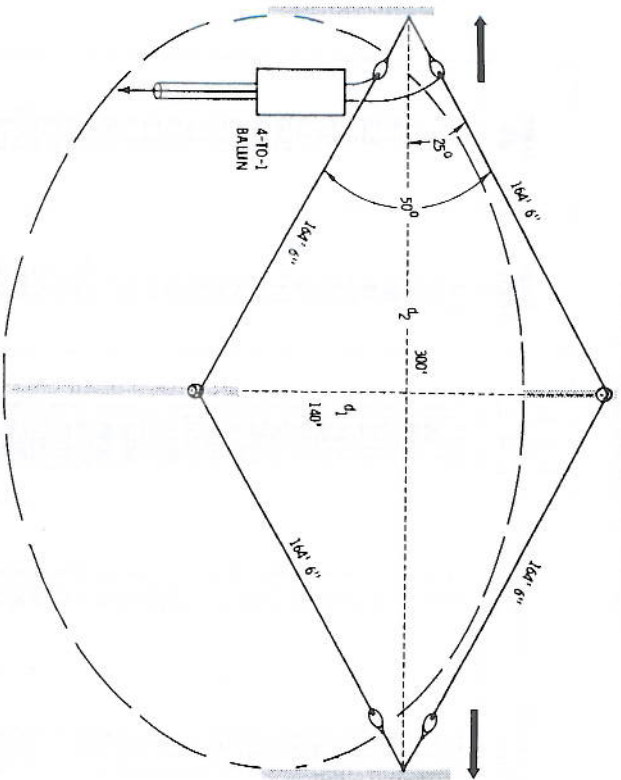


Fig. 77. 10-15 rhombic.

Simple trigonometry can now be used as an aid in locating the poles and determining space requirements. The distance between the side poles is:

$$d_1 = 2(\sin 25^\circ \times 164.5) \approx 140'$$

Distance between the near and end poles is:

$$d_2 = 2(\cos 25^\circ \times 164.5) \approx 300'$$

If additional erection space is available, the formula values of $55/4$ on 10 and $41/4$ wavelengths on 15 are attractive:

$$(10) \text{ Side length} = \frac{13,530}{28.6} = 473.1 \text{ feet}$$

$$(15) \text{ Side length} = \frac{10,086}{21.3} = 473.5 \text{ feet}$$

These correspond to leg lengths of 6,875 and 5,125 wavelengths for 10 and 15 meters respectively. Preferred apex angles are 43.5° and

Dimensions for the quarter-wave sides of the dipole based on band centers (Chart 4) are 62' 11", and 32' 8" for the 80- and

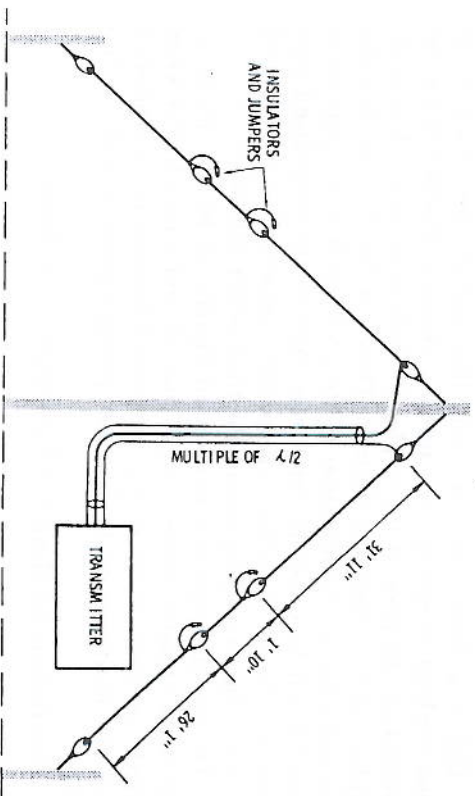


Fig. 36. 15-40-80 Novice-band inverted vee.

40-meter novice bands respectively. The three-quarter-wavelength dimension for 15-meter operation is:

$$(15) \text{ Leg length} = \frac{738}{21.175} = 34' 10''$$

Inverted-vee operation requires some shortening, and the practical dimensions for band-center resonances are as given in Fig. 36. Half-wavelength segments of line on the three bands have the following dimensions:

$$(80) \text{ Half-wave line length} = \frac{325}{3.725} = 87' 3''$$

$$(40) \text{ Half-wave line length} = \frac{325}{7.175} = 45' 4''$$

$$(15) \text{ Half-wave line length} = \frac{325}{21.175} = 15' 4''$$

For a separation of something less than 100 feet, a 91-foot transmission line (regular 72-ohm coaxial) would suffice ($87' 3'' \times 1, 45' 4'' \times 2$, and $15' 4'' \times 6$). Refer to topics 1, 2, 4, 9, 13, 17, 22, and 27.

in Fig. 76. You will note that the tilt angle is that angle made at the side corners of the rhombic. The right triangle set off by the dashed lines indicate that the tilt angle is 90° minus one half of the apex angle:

$$\phi^\circ = 90^\circ - \frac{\theta^\circ}{2}$$

One other angle important to long-wire antennas such as the rhombic is the so-called wave angle. This refers to the vertical angle of radiation of a horizontal antenna relative to the horizontal plane of the antenna. For example 0° wave angle refers to the radiated r-f energy that comes off the antenna in the plane of the antenna. A wave angle of 90° would be the radiation rising perpendicular (at right angles) to the plane of the rhombic. For radio amateur and most communication application for long-wire antennas, the desired wave angles fall somewhere between 0 and 15 degrees. Chart 9 is based on a 0° wave angle.

The preferred apex angle for a rhombic is the same as a vee antenna having the same leg length. It is important to note that the leg length of a rhombic refers to one of the four equal-length sides of a rhombic.

As in the case of a vee-beam antenna or other forms of long-wire antennas, the selection of the proper leg length resonates the antenna in such a manner that a low resistive impedance can be presented at the feed point. The total length of the wire that makes up each of the two sides must be an odd multiple of an electrical quarter wavelength long or:

$$\text{Leg 1} + \text{leg 2} = \text{leg 3} + \text{leg 4} = \text{odd multiple of a quarter wavelength}$$

Chart 9 supplies the necessary information for determining formula leg lengths. The far end of the rhombic antenna wire can then be trimmed to attain a desired resonant frequency. Again by careful choice of leg length, the rhombic, like the vee-beam antenna, can be resonated on more than one band. The antenna can be matched to the coaxial transmission line by means of a balun and no tuning is required. Low standing-wave ratios are feasible. A line tuner can be used at the transmitter if you wish the transmitter to operate into the lowest possible SWR figure.

inverted-vees. Appropriate combinations and proper cutting provides sideband operation on each band from 6 through 80 meters. No tuner is needed.

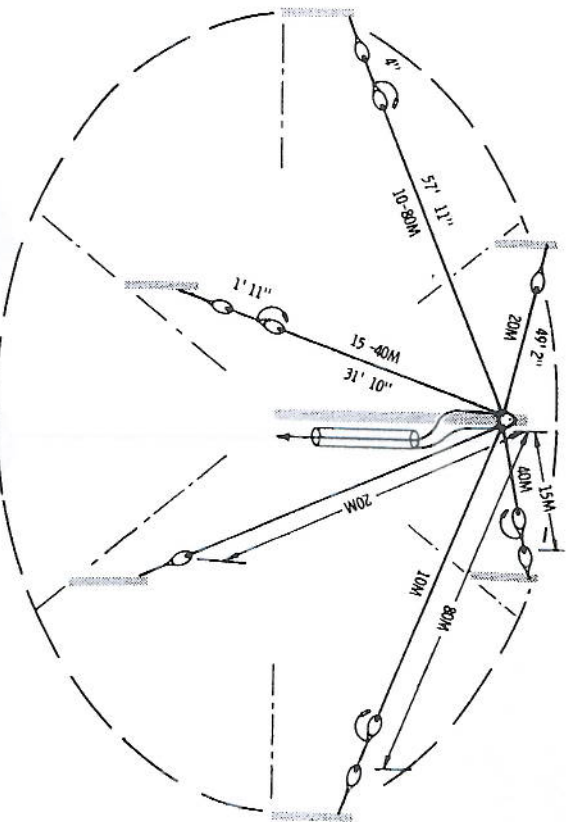


Fig. 37. Inverted-vee trios.

Three inverted vees (Fig. 38) are connected to a common feed point; a separation of 60° is maintained between legs. Two vees are inverted dipoles cut to resonate in the 40- and 80-meter phone bands. The third element is a three-halves wavelength long-wire (three-quarter wavelength on a leg) cut for the 20-meter phone band. These three elements also provide operation on 6, 10, and 15 meters. The 40-meter segment functions as a three-quarter wavelength long-wire on 15 meters while the 80-meter element operates $7/2$ wavelength on 10. The 20-meter vee operates as an $11/2$ -wavelength antenna on 6 meters.

The length of the transmission line should be a compromise that approximates a length corresponding to a whole multiple of a half wavelength on each band. This is feasible using a length of coaxial cable (velocity factor of 0.66) that is a whole multiple of 90 feet in length. Inasmuch as matching is seldom a problem with 80-meter dipoles, a multiple of 45 feet is equally good.

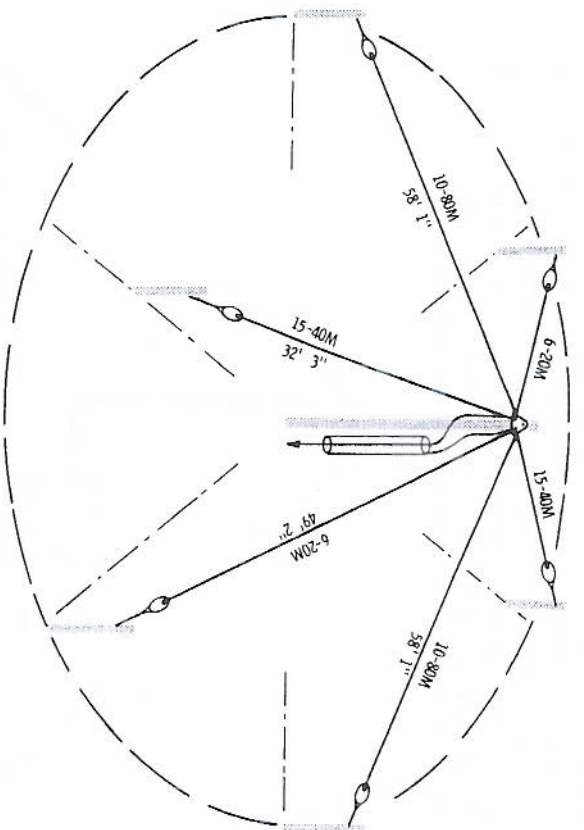


Fig. 39. W3FQJ inverted-vee 6 through 80 sideband.

Practical dimensions for the inverted-vee construction are somewhat shorter than the formula values. The dimensions of Fig. 39 establish the following resonances:

- 80 meters—3.9 MHz
- 40 meters—7.2 MHz
- 20 meters—14.3 MHz
- 15 meters—21.42 MHz
- 10 meters—28.58 MHz
- 6 meters—51.4 MHz

Refer to topics 1, 2, 9, 13, 14, 15, 17, and 22.

31 — Long-Wire Inverted Vees With Line Tuner

A line tuner mounted at the transmitter end of a transmission line has as its major function the optimum loading of the *transmitter*. Within sensible operating limits, it is capable of establishing a standing-wave ratio less than 1.5 to 1 over a substantial frequency range. It permits the transmitter to see this proper load even though the standing-wave ratio on the transmission line might be quite high. Two additional benefits of the line tuner is that optimum operating conditions can be established over an entire amateur band even though the antenna is peaked

SECTION 3

Long-Wire Antennas

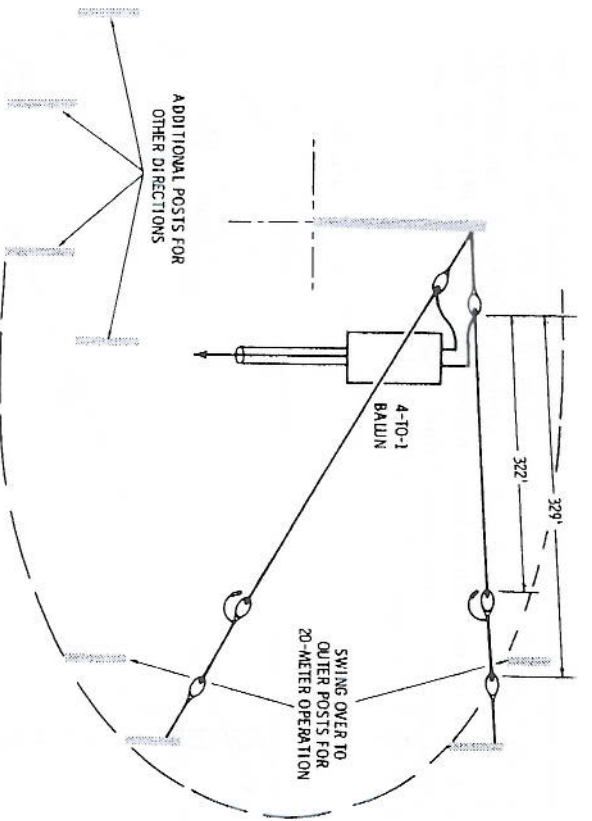


Fig. 74. 10-15-20 sloping end-loaded vee beam.

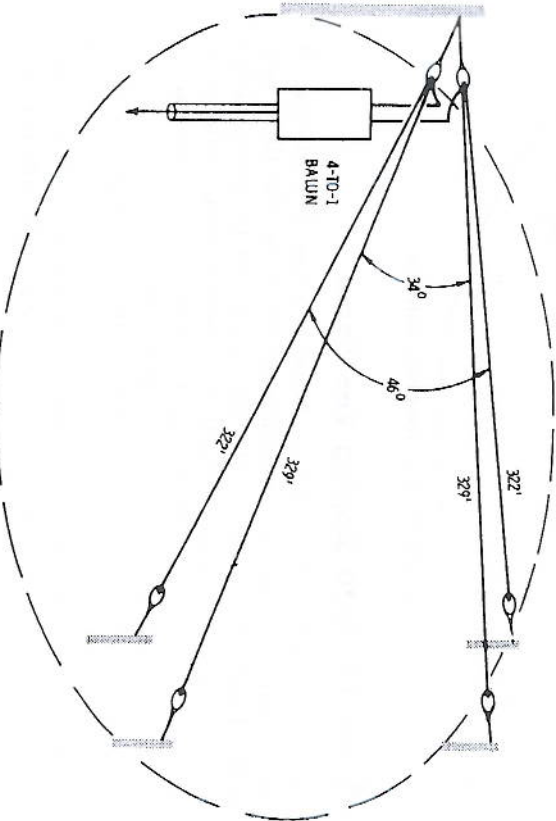


Fig. 75. 10-15-20 four-wire sloping vee beam.

20-meter operation of a long vee antenna of this length is 46° . To obtain this angle the separation between the end wires should be:

32 — Single Long-Wire Resonant Antennas —Center-Fed

Antennas can be resonated to a specific frequency by making their overall electrical length a whole multiple of a half wavelength. A low-impedance feed point can be found by making each of the legs an odd multiple of a quarter wavelength long. Legs can be equal or of unequal lengths just so each is some multiple of an odd quarter wavelength.

When additional electrical length is added to an antenna, changes are made in the radiation pattern. In the case of a horizontal long-wire antenna, the greater its length is, the higher is the gain, the greater is the number of horizontal lobes, and the more directional the antenna becomes in the directions off its ends.

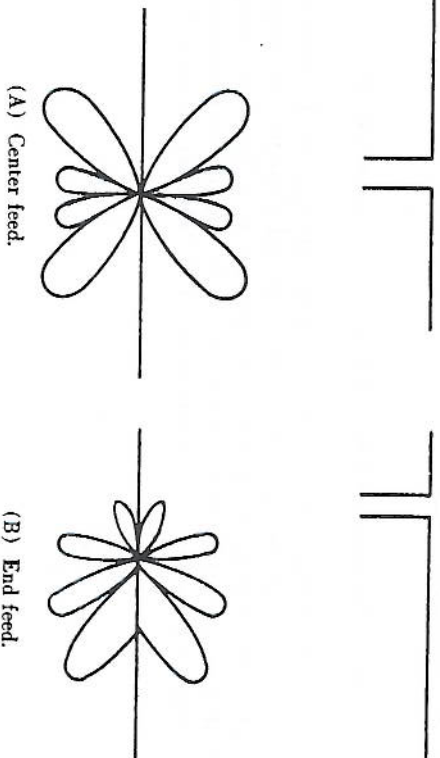


Fig. 41. Lobes of 2-wavelength long wire.

When such an antenna is center-fed, the antenna lobes are symmetrical on each side of the feed point (Fig. 41A). When such an antenna is fed at a low-impedance point near one end, the lobes on the long-leg side become the stronger and orient them-

somewhat higher impedance of a long-wire antenna. Such a tuner can be mounted in a weatherproof box at the base of the mast. A 50-foot section of open-wire 450-ohm line links the feed point of the vee antenna to the balanced output side of the tuner (Fig. 72). Coaxial line between tuner and transmitter is made a whole multiple of an electrical half wavelength. Refer to topics 1, 2, 17, 31, 52, and 53.

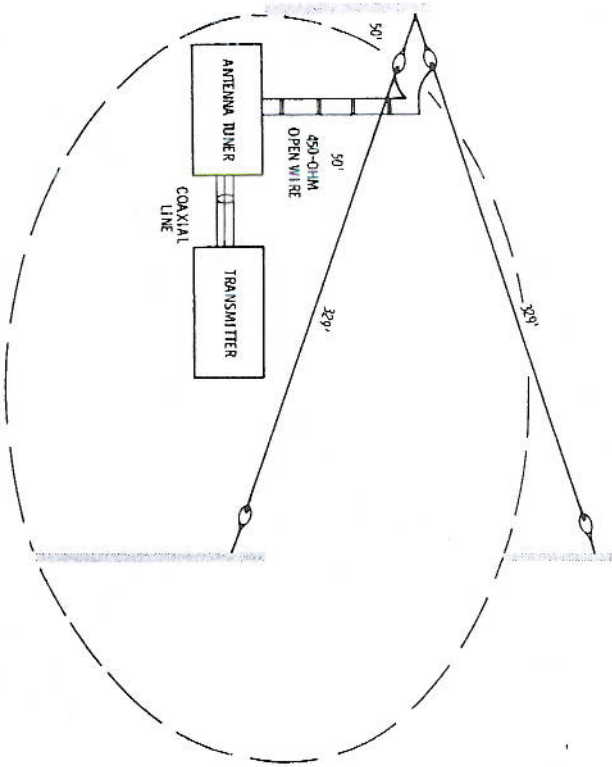


Fig. 72. Use of antenna tuner with vee-beam antenna.


55 — Sloping Vee Beam

A sloping vee-beam antenna is a modified version of the horizontal vee beam in which the far wire ends are nearer ground level than the feed point (Fig. 73). As compared to the horizontal vee beam, there is somewhat less gain at the maximum-gain frequency, but a more uniform gain over a wider span of frequencies. Furthermore the legs slope toward ground, which permits a simple far-end mast, or support structure, and greater ease in making antenna resonance and angle changes. Furthermore with adequate space and proper positioning of several fence posts, it is possible to orient the antenna for maximum gain in a number of preferred directions.

MHz on 10. Direct connection to the transmitter without any intervening tuner is possible if the transmission-line length approximates a whole multiple of an electrical half wavelength. Refer to topics 1, 2, 16, and 17.

33 — Single End-Fed Monoband Long-Wire Resonant Antennas

Long-wire antennas can be fed conveniently a quarter wavelength in from one end. By so doing the length of the transmission line between the transmitter and antenna often can be reduced substantially. The quarter-wave displacement from the end locates a low-impedance feed point, and for antennas no more than several wavelengths long, a suitable direct match can be made to a low-impedance coaxial line (Fig. 44A). A four-to-one balun matches a longer antenna (Fig. 44B).

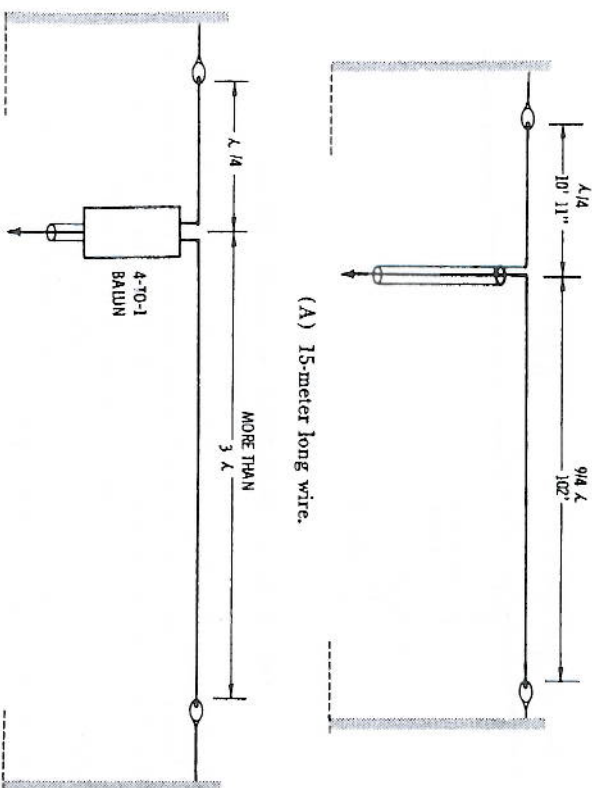

(B) Balun feed for long long wires.

Fig. 44. End-fed long-wire antennas.

In general, the impedance of an end-fed long wire of a given length is higher than a center-fed version (topic 32). Furthermore the end-fed type is more directional in the direction of the long leg as compared to the short leg. Both legs of the antenna must

Chart 8. Sin and Cos Functions

Degrees	Sin	Cos
10.0	.174	.985
10.5	.182	.983
11.0	.191	.982
11.5	.199	.980
12.0	.208	.978
12.5	.216	.976
13.0	.225	.974
13.5	.233	.972
14.0	.242	.970
14.5	.250	.968
15.0	.259	.966
15.5	.267	.964
16.0	.276	.961
16.5	.284	.959
17.0	.292	.956
17.5	.301	.954
18.0	.309	.951
18.5	.317	.948
19.0	.326	.946
19.5	.334	.943
20.0	.342	.940
21.0	.358	.934
22.0	.375	.927
23.0	.391	.920
24.0	.407	.914
25.0	.423	.906
26.0	.438	.899
27.0	.454	.891
28.0	.469	.883
29.0	.485	.875
30.0	.500	.866
35.0	.574	.819
40.0	.643	.766
45.0	.707	.707
50.0	.766	.643

52 — Long Horizontal Vee-Beam Antenna, Two Bander

The long vee-beam antenna is attractive for use on two bands (particularly 10 and 15 or 15 and 20). Only a matching balun is required. No tuner is necessary when using a proper leg length.

The example of Fig. 70 demonstrates this possibility. In topic 51 a 10-meter leg length corresponding to 39/4 wavelengths was employed. It is to be noted that a leg length of 29/4 wavelengths cut for 15-meter operation is approximately the same. Leg length is:

$$(15) \text{ Leg length} = \frac{7134}{21.3} = 334.9 \text{ feet}$$

used for both 10- and 15-meter operation. Thus in changing operation between the two high-frequency bands, only the jumpers at the feed end need be shifted.

The bearing of the long leg, as erected in eastern Pennsylvania, was set at 255°. On 10 meters where the directivity is sharpest, a strong-signal belt ran diagonally across the continental U.S. At the same time, good reports were obtained in the southern states and in north central states, thanks to the secondary lobes. Of course, on the lower bands the number of electrical wavelengths on the legs is not as great, and the horizontal radiational pattern is less sharp, thus encompassing a larger area of major-lobe coverage. Refer to topics 1, 2, 16, 17, 18, 19, 32, and 33.

35 — Single Random Wire With Line Tuner

One of the most convenient antennas is a single length of wire in association with a tuner (Fig. 47). The simple tuner of Appendix VI does a fine job. The random length of wire employed should be at least one-quarter wavelength at the lowest operating frequency. If 10- through 80-meter operation is desired, the total length of the random wire should be approximately 60 feet. Increase the length to about 123 feet if 160-meter operation is desired.

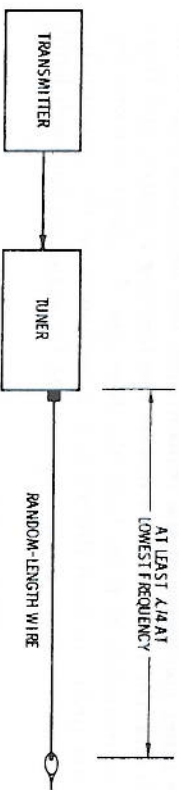


Fig. 47. Random-length single-wire antenna and tuner.

The most favorable operation is obtained when the total length of the random wire is such that its impedance at the tuner end is low. A quarter wavelength of antenna presents such a low impedance to the tuner. Try to avoid antenna lengths that are multiples of a half wavelength because they present a maximum impedance point to the tuner. It is wise then to use random lengths of wire that fall rather close to those obtained using Chart 5. Usually a compromise length can be found that does not present a high impedance to the tuner on any one of the bands you wish to operate.

For example, 40- and 80-meter Novice-band operation would indicate a random-wire length somewhere between 80 and 100 feet. Although a length of 60 feet presents a quarter wavelength on

recommended angle is 32°. The formula value of the leg length from Chart 5 is:

$$(10) \text{ Leg length} = \frac{9594}{28.6} = 335.4 \text{ feet}$$

In a practical version of this antenna with the feed point 50 feet in the air and the two ends 45 feet high, leg length had to be reduced to 329 feet to obtain resonance at 28.6 MHz (Fig. 68). A 4-to-1 balun was employed, and the overall length of the 50-ohm transmission line was a whole multiple of an electrical half wavelength.

Chart 7. Angle Between Wires for Long Vee Beams

Leg Length in Wavelengths (λ)	Angle	Gain (dB)
11/4 λ	60°	5.3
13/4 λ	56°	5.8
15/4 λ	52°	6.3
17/4 λ	48°	6.8
19/4 λ	46°	7.2
21/4 λ	44°	7.6
23/4 λ	42°	8
25/4 λ	40°	8.4
27/4 λ	38°	8.8
29/4 λ	37°	9.2
31/4 λ	36°	9.6
33/4 λ	35°	10
35/4 λ	34°	10.3
37/4 λ	33°	10.5
39/4 λ	32°	10.7
41/4 λ	31°	10.9

How much erection space is required for the above antenna?
 This is a simple trigonometric calculation using the sine natural functions (Fig. 69 and Chart 8). Each leg of the vee is the hypotenuse of a right triangle with the bisector line being one side. The included angle is 16° (32/2). Therefore the distance between one of the leg ends and the bisector line (side A) is:

$$A = 329 \times \sin 16^\circ = 329 \times 0.2756 = 90.7 \text{ feet}$$

The separation between the two ends of the vee legs is twice this value or slightly more than 181 feet.

A line tuner in conjunction with the antennas of Fig. 43 and Fig. 44A permits operation on both the 20- and 40-meter bands. The antenna functions as discussed in topics 32 and 33 on 10 and 15 meters. However, in conjunction with the transmission line, it operates as a random-wire style for 20, 40, and 80 meters. In fact, if the transmission line itself is long enough, it will also load on 160 meters (total length of line plus the length of the long leg should be at least 130 feet). Refer to topics 1, 2, 17, 31, 32, 33, 34, and 35.

SECTION 4

Vee-Beam Antennas

37 — End-Fed Monoband Inverted-Vee Beam

An inverted-vee antenna can be end-fed as shown in Fig. 49. A low-impedance feed point is found by attaching the transmission line at a point one-quarter wavelength away from one of the leg ends. The other leg is made much longer. The apex point is at the center of the total antenna span. No tuner is needed when the overall length of the long span is made an odd quarter wavelength long. Low standing-wave ratios are possible without too-critical adjustments of the overall length.

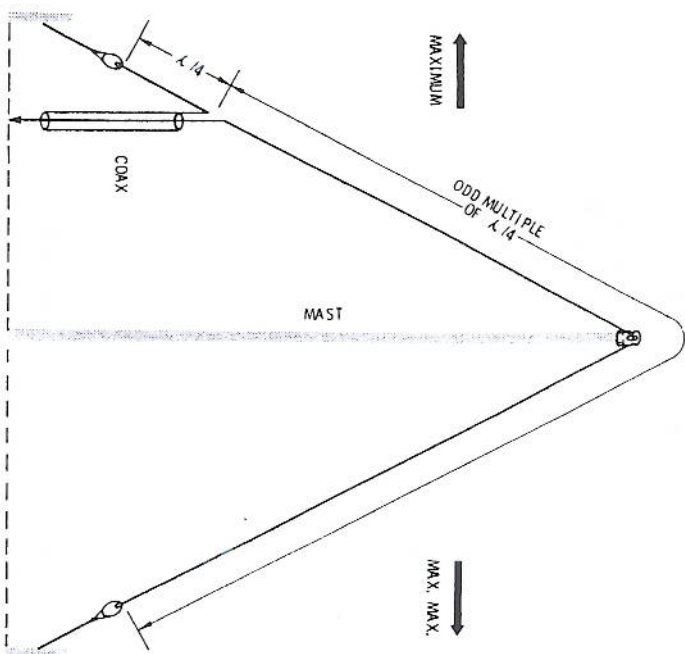


Fig. 49. End-fed inverted-vee beam.

operation on 15 and 40 meters, while the shorter pair is 84 feet and optimized for 10- and 20-meter operation. The apex angle is 65 to 75 degrees, and the length of the transmission line is made an optimum whole multiple of an electrical half wavelength. Refer to topics 1, 2, 17, 44, 45, and 48.

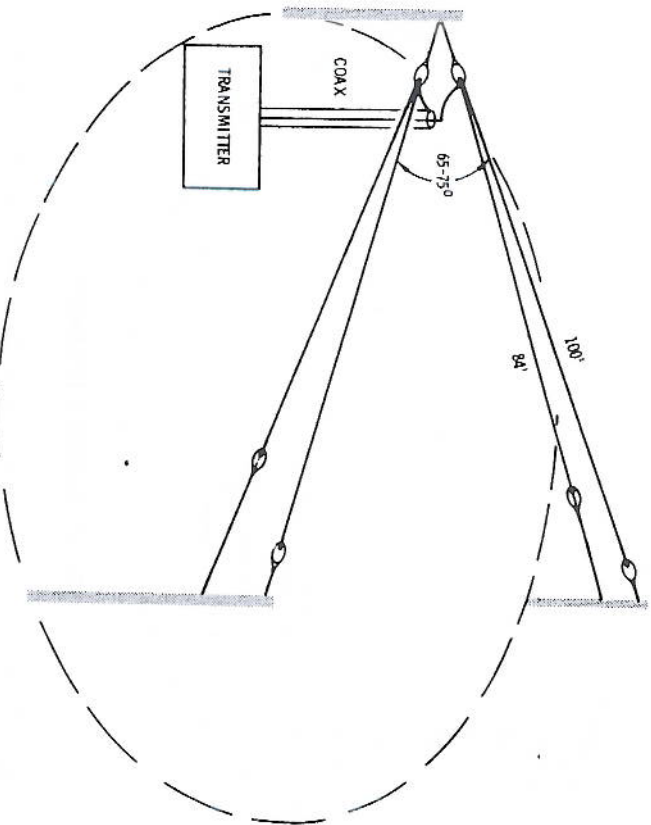


Fig. 65. 10-15-20-40 short vee beam.

50 — 10-15-20-40-80 Vee Beam and Inverted Dipole

It is possible to add 80-meter operation to the antenna of topic 50 in two ways. A 60-foot pair of antenna wires can be connected to the vee beam. However, this requires a substantial additional span of plastic clothesline or rope, or two separate masts for the 80-meter element. An effective approach is to simply add an 80-meter inverted vee (Fig. 66) to the short vee-beam construction. Inasmuch as the 60-foot 80-meter segment also resonates in the 10-meter band, there is some 10-meter omnidirectional radiation that is beneficial for local 10-meter operations. Refer to topics 1, 2, 17, 44, and 49.

$$\text{Long-leg length in feet} = \frac{2706}{14.2} = 190' 6''$$

$$\text{Short-leg length in feet} = \frac{234}{14.2} = 16' 5''$$

Actual dimensions for a practical version are given in Fig. 50. Apex height was 45' above ground. Refer to topics 1, 2, 22, and 33.

38 — 10-, 15-, and 20-Meter Inverted-Vee Beam

Two attractive features of the inverted-vee end-feed arrangement are: that the leg ends and feed point are accessible from ground level where changes can be made conveniently, and operation as a resonant gain antenna can be accomplished on more than one band with limited changes in overall leg length.

An antenna with legs properly segmented for sideband operation is shown in Fig. 51. Reference to Chart 5 and suitable substitu-



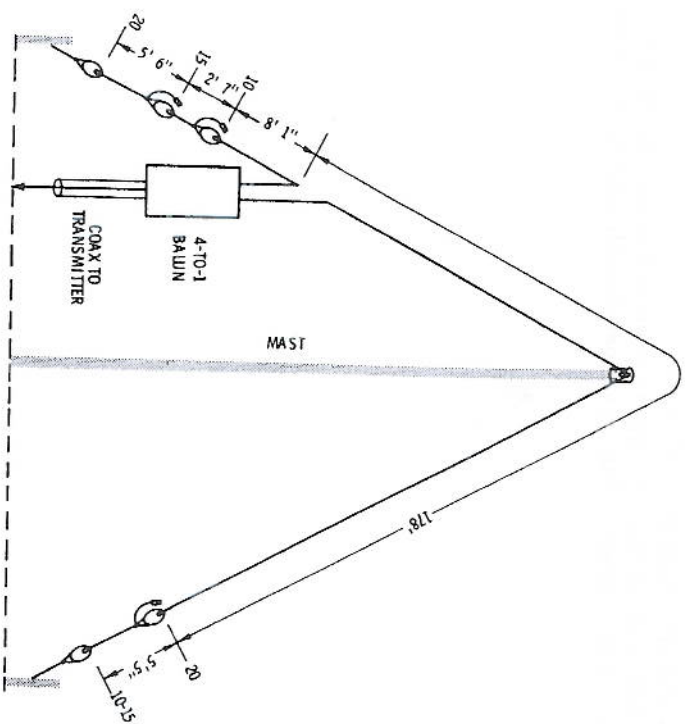


Fig. 51. 10-15-20 inverted-vee beam.

tions indicate feasible dimensions for the long leg of 11/4 wavelength on 20, 17/4 wavelength on 15, and 23/4 wavelength on 10:

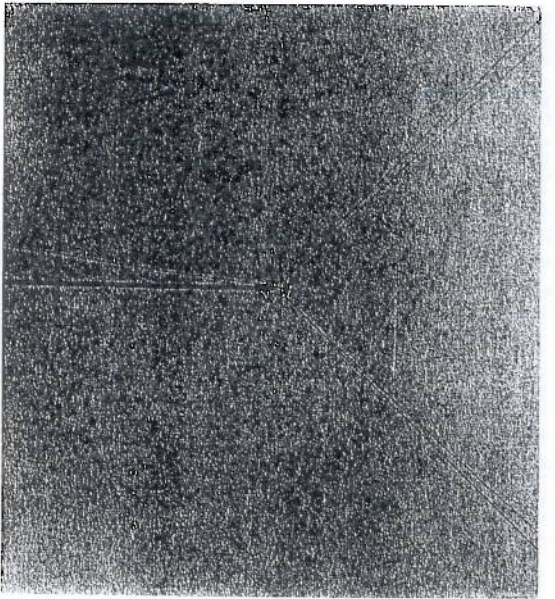

(A) Feed-point arrangement.

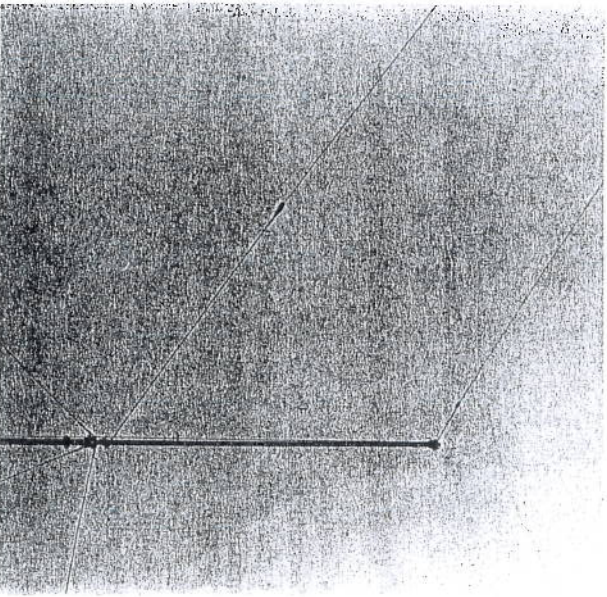

(B) Far-end view.

Fig. 63. 10-15-20 short vee.

from the opposite end to permit an electrical length of $5/4$ wavelength on 40. This places the jumper point rather high on the long leg and convenient facility must be included to release this side of the antenna to make 40-meter band changes. Refer to topics 1, 2, 17, 22, 25, 33, and 37.

39 — Four-Band Inverted-Vee Beam With Tuner

A simple tuner of the type described in Appendix VI can be used conveniently with the inverted-vee style of antenna. Such a tuner can be positioned at the transmitter where its function would be to make certain that the transmitter operates into a proper load regardless of antenna resonance and standing-wave conditions on the line. A more efficient plan of feeding is to locate the tuner at the antenna feed point (Fig. 53). Here its responsibility would be to match the antenna to the transmission line; therefore, there is minimum standing wave developed on the transmission line, regardless of the frequency of operation. The transmitter also sees the proper load looking into its end of the transmission line.

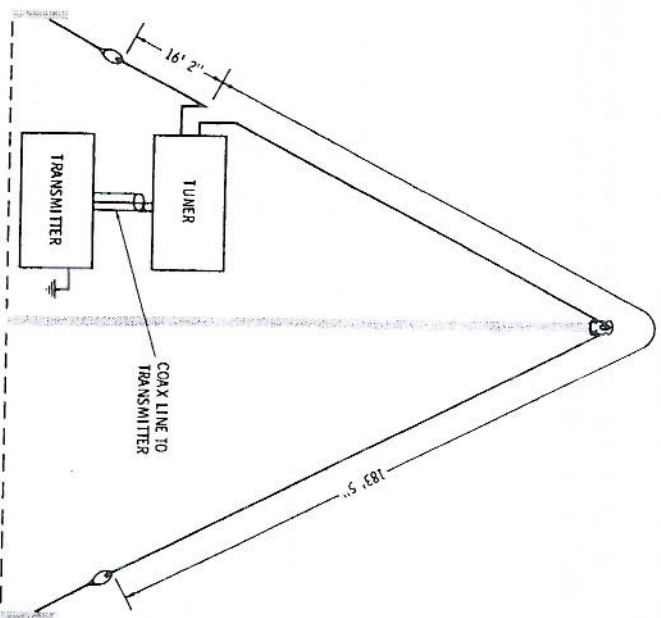


Fig. 53. Long-wire inverted vee with tuner.

zontal directivity pattern, but there was a possible increase in the vertical angle in other than the forward direction. In the forward direction, the low-angle radiation was improved. Leg lengths employed were the same as given in topics 44 and 45. Refer also to topics 1, 2, 33, 40, and 41.

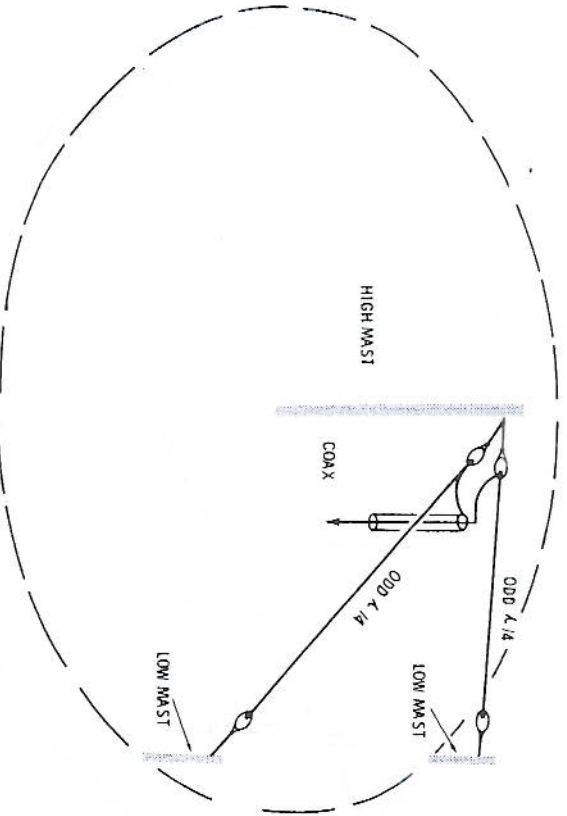


Fig. 61. Tilted vee beam.

47 — 10-15-20 Short Vee Beam

Three-band operation of a short horizontal vee is feasible using two pairs of legs of differing length. No tuner is needed and quick band changes can be made. In a practical version of this idea (Fig. 62) one pair of legs is cut for optimum two-band operation on 10 and 15 meters. A leg length of 56' was employed as in topic 45. The other pair of legs of 51' 2" provide optimum operation on 20 meters. The two pairs of legs span outward from the center feed point reaching a ten-foot separation at the leg ends. Thus the antenna has a conical appearance (Fig. 63) but the legs on each side are of differing lengths. Cut critically for sideband operation, the SWR can be kept below 1.5 to 1. The compromise angle is 80°.

The short vee beam is a good all-around antenna and emphasizes a favored direction. This antenna erected along the east coast with the bisecting direction toward the south would give three-

included angle. Minor side and back lobes remain; therefore the antenna has omnidirectional capability as well. The included angle between the two legs should be approximately 90° and may be as high as 110°. Leg lengths are based on the 3/4-wavelength value of Chart 5. In most cases the horizontal-vee type antennas require some 4 to 6 percent shortening from the chart formula values. Calculations for 10, 15, and 20 meters are:

$$(20) \text{ Leg length} = \frac{738}{14.2} = 52'$$

6 percent shortening reduces length to 49'.

$$(15) \text{ Leg length} = \frac{738}{21.3} = 34' 6''$$

6 percent shortening results in a leg length of 32' 6''.

$$(10) \text{ Leg length} = \frac{738}{28.6} = 25' 10''$$

6 percent shortening results in a leg length of 24' 3''.

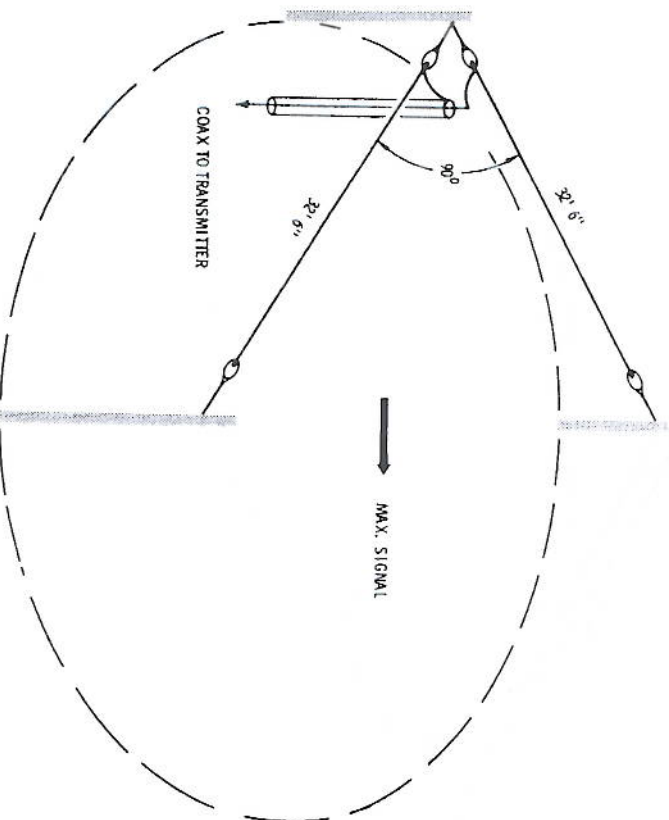


Fig. 55. 15-40 horizontal vee.

Practical dimensions for a short horizontal vee beam for 20-meter operation can be obtained from the appropriate chart. Leg lengths for 5/4-wavelength operation from Chart 6 are:

$$(20) \text{ Leg length} = \frac{1230}{14.2} = 86' 6''$$

Using 6 percent shortening, the leg length reduces to 81' 5".

Chart 6 suggests an antenna angle of 86°. Such an antenna has a gain of 3.3 dB.

Chart 6. Angle Between Wires for Short Vee-Beams

Leg Length in Wavelength (λ)	Angle	Gain (dB)
3/4 λ	100°	2.5
5/4 λ	86°	3.3
7/4 λ	76°	4.0
9/4 λ	67°	4.75
11/4 λ	60°	5.3

Antenna resistance rises slowly with leg length. It is also influenced by the included angle. It has been found that the short vee-beam antennas (two-wire type) can be connected directly to a low-impedance coaxial transmission line. No tuner is needed for matching. Cut your line to a whole multiple of an electrical half wavelength. SWR ratios are no greater than 2 to 1 and substantially lower over most of the band. If this is a matter of concern to you, a simple line tuner such as described in Appendix VI can be used at the transmitter end of the line. No tuner is needed at the feed point. Refer to topics 2, 17, 31, 40, and 41.

45 — Duo-Band Horizontal Short Vee Beams

A proper choice of leg length permits two-band operation of a short vee beam. In addition to the 15-40 combination covered in topics 41 and 42, other possible pairs are 10-15, 10-20, and 10-80. Practical dimensions are given in Fig. 60.

The 10-15 antenna with a leg length of 56' operates 5/4 wavelength on 15 meters and 7/4 wavelength on 10 meters. The 49' leg length is a compromise choice for 5/4-wavelength operation on 10 and 3/4-wavelength on 20. The 60' leg length is a compromise that provides simple dipole operation on 80 meters and 7/4-wavelength on 10.

A compromise apex angle for the three antennas is about 80° to 85°. In general, the smaller the apex angle is, the greater

frequency on the two bands. Cut your transmission line length to a whole multiple of an electrical half wavelength. Refer to topics 1, 2, 16, 17, and 40.

42 — 15-40 Conical Three-Halves-Wavelength Vee

Antenna resistance can be raised and bandwidth increased by attaching additional legs to the basic vee style of antenna. The antenna of Fig. 56 uses four legs (two on each side of the center feed point). A leg length of 32' 6" was found to be optimum for 15- and 40-meter band operation as a dipole on 40 and as a 3/2-wavelength antenna on 15.

In this arrangement a very low SWR was attained on 15 meters and a somewhat higher figure on 40 meters (the converse of the antenna of topic 41). The included angle was 90° and transmission-line length was an even multiple of an electrical half wavelength. Refer to topics 1, 2, 16, 17, 40, and 41.

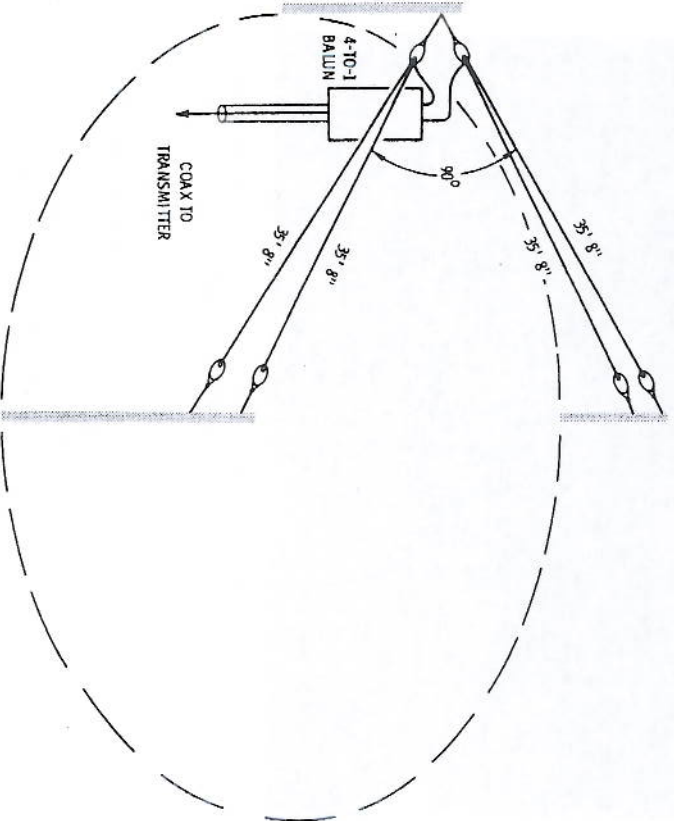


Fig. 57. Conical vee with balun.